

CHLF(T)4-30

CHLF(T) | Horizontal multistage stainless steel centrifugal pump



CNP-M-000927

Scan to open this online



FLOW RANGE

1 - 7 m³/h

HEAD RANGE

13 - 28 m

MOTOR

0.55 kW

SPEED


2900 rpm

Specifications

Series	CHLF(T)
Size	CHLF4
Stages	3
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	10 bar
Connection	Thread inlet G1½, outlet G1
Weight	11 kg
Data basis	Published performance curve (Performance table printed pp. 21–22)

Performance curve

Head versus flow - CHLF(T)4-30, 50 Hz

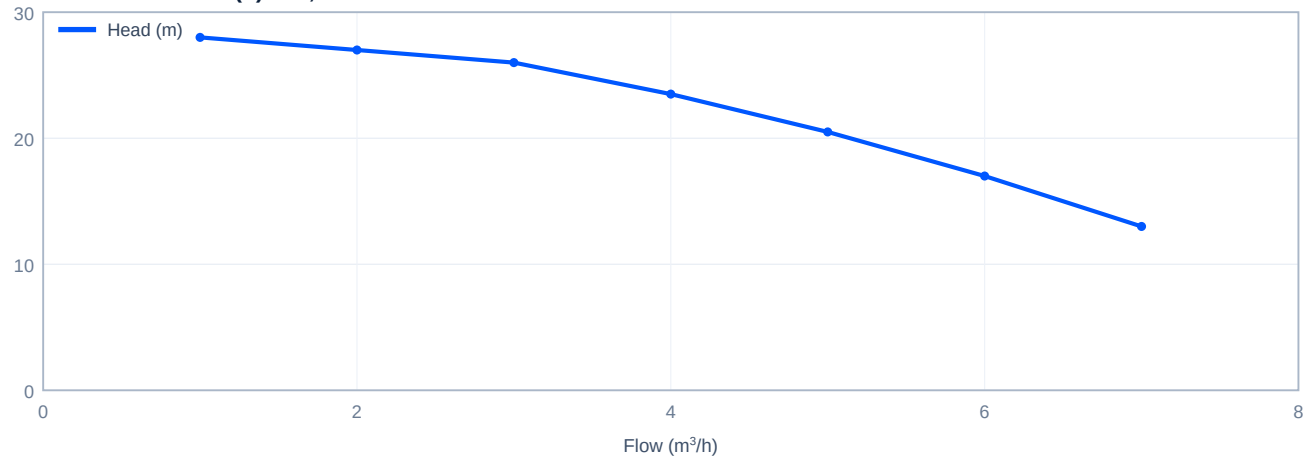

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	28
2	27
3	26
4	23.5



Flow (m³/h)	Head (m)
5	20.5
6	17
7	13

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	356
L2	L2	132
L3	L3	129
D	D — motor width, three-phase	141
H	H — height, three-phase	215
H_1ph	H — height, single-phase	230
K_1ph	K — single-phase only	62
-	Net weight	11

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-5671B. Contact: +92 345 9547419 sales@cnppakistan.com