

CHLF(T)15-20

CHLF(T) | Horizontal multistage stainless steel centrifugal pump



CNP-M-000617

Scan to open this online



FLOW RANGE

10 - 26 m³/h

HEAD RANGE

23 - 35.5 m

MOTOR

3 kW

SPEED


3500 rpm

Specifications

Series	CHLF(T)
Size	CHLF15
Stages	2
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	3 kW (4 hp)
Max pressure	10 bar
Connection	Thread inlet G2, outlet G2
Weight	36 kg
Data basis	Published performance curve (Performance table printed pp. 51–52)

Performance curve

Head versus flow - CHLF(T)15-20, 60 Hz

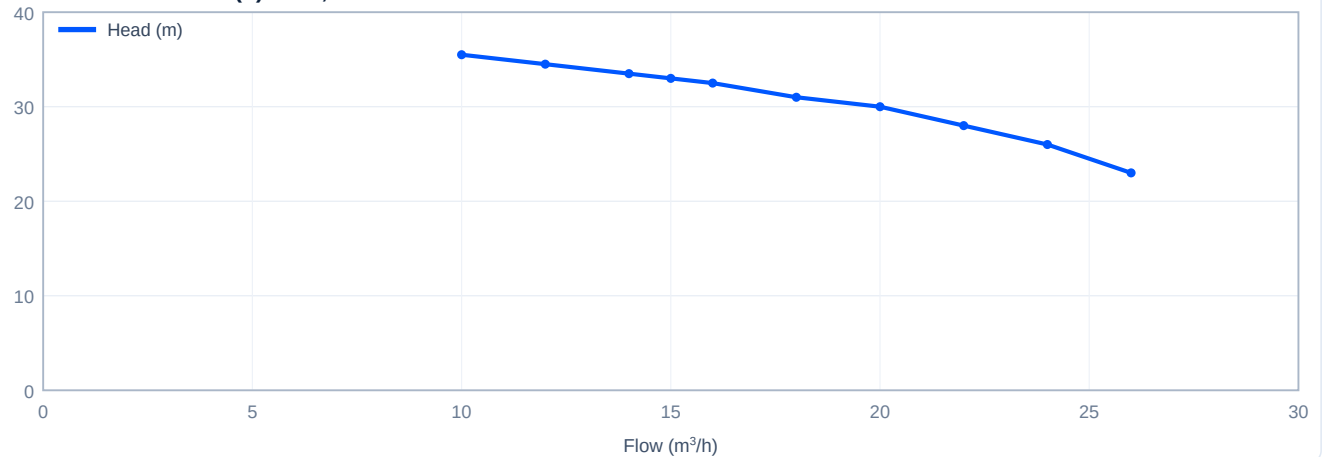

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
10	35.5
12	34.5
14	33.5
15	33



Flow (m³/h)	Head (m)
16	32.5
18	31
20	30
22	28
24	26
26	23

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	499
L2	L2	150
L3	L3	126
N	N	128
E	E	238
A	A	130
M	M	108
B	B	160
J	J	138
d	d — bolt hole	9
D	D — motor width, three-phase	197
H	H — height, three-phase	259
-	Net weight	36

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-8F330. Contact: +92 345 9547419 sales@cnppakistan.com