

CHLF(T)20-10

CHLF(T) | Horizontal multistage stainless steel centrifugal pump



CNP-M-001277

Scan to open this online



FLOW RANGE

12 - 32 m³/h

HEAD RANGE

10 - 19 m

MOTOR

2.2 kW

SPEED


3500 rpm

Specifications

Series	CHLF(T)
Size	CHLF20
Stages	1
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	2.2 kW (3 hp)
Max pressure	10 bar
Connection	Thread inlet G2, outlet G2
Weight	26 kg
Data basis	Published performance curve (Performance table printed pp. 53–54)

Performance curve

Head versus flow - CHLF(T)20-10, 60 Hz

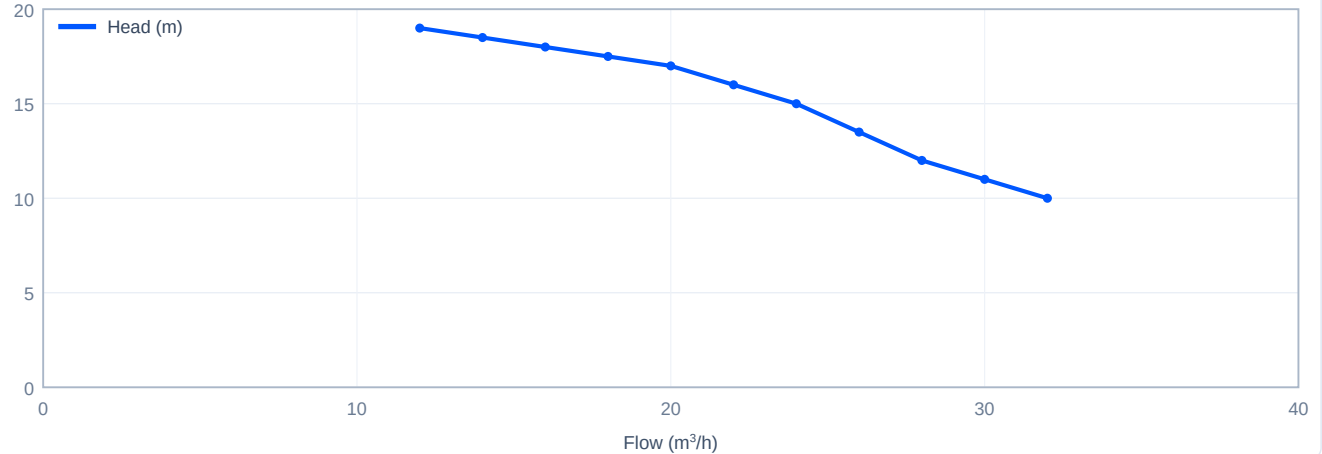

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
12	19
14	18.5
16	18
18	17.5



Flow (m³/h)	Head (m)
20	17
22	16
24	15
26	13.5
28	12
30	11
32	10

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length, three-phase	440
L1_1ph	L1 — overall length, single-phase	451
L2	L2	150
L3	L3	126
N	N	118
E	E	228
A	A	130
M	M	108
B	B	160
J	J	138
d	d — bolt hole	9
D	D — motor width, three-phase	171
D_1ph	D — motor width, single-phase	176
H	H — height, three-phase	240
H_1ph	H — height, single-phase	270
K_1ph	K — single-phase only	91
-	Net weight	26

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-FD9AE. Contact: +92 345 9547419 sales@cnppakistan.com