

CHME3-6

CHME (VFD) | Horizontal multistage stainless steel centrifugal pump



CNP-M-000847

Scan to open this online



FLOW RANGE

0.8 - 5.2 m³/h

HEAD RANGE

27.5 - 62.5 m

MOTOR

1.1 kW

SPEED


3500 rpm

Specifications

Series	CHME (VFD)
Size	CHME3
Stages	6
Mains frequency	50 Hz
Speed	3500 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	10 bar
Connection	Thread inlet / outlet G1 / G1
Weight	20 kg
Data basis	Published performance curve (Performance table printed pp. 4–6; dimensions p. 7)

Performance curve

Head versus flow - CHME3-6, 50 Hz

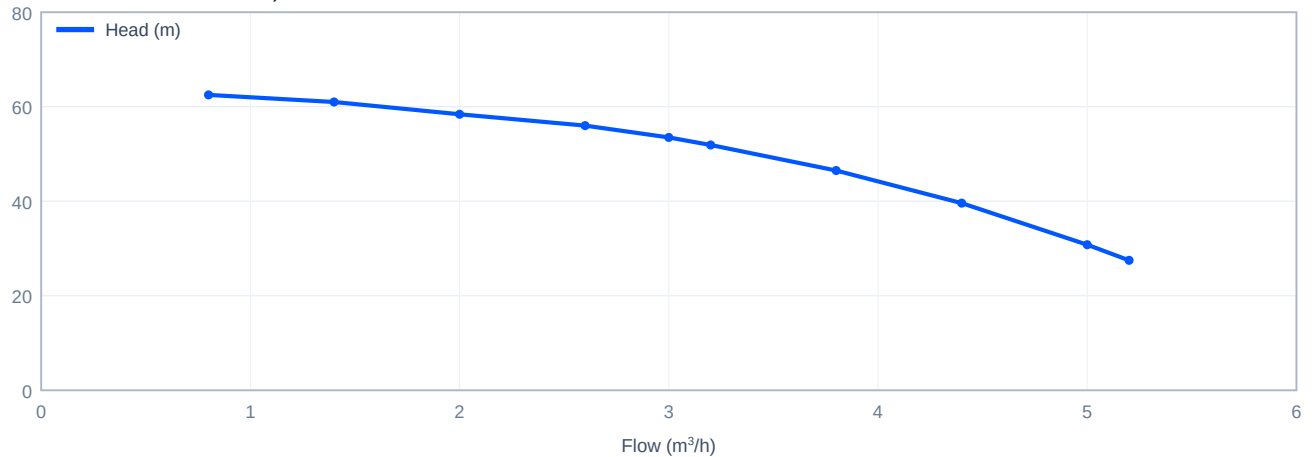

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.8	62.5
1.4	61
2	58.4
2.6	56



Flow (m³/h)	Head (m)
3	53.5
3.2	51.9
3.8	46.5
4.4	39.6
5	30.8
5.2	27.5

Dimensions (mm)

Code	Description	Value
L	L — overall length	401
L1	L1	197
L2	L2	96
L3	L3	160
L4	L4	92
B	B — tank width	158
B1	B1 — lower section height: base to motor flange	125
B2	B2 — upper section height: motor	158
B3	B3	100
B4	B4	115
H	H — overall height	475
H1	H1 — inlet axis height	85
H2	H2 — outlet height	175
D	D — motor width	151
-	Net weight	20

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-3267B. Contact: +92 345 9547419 sales@cnppakistan.com