

HP32-11×2

HP | High-pressure pump



CNP-M-001290

Scan to open this online



FLOW RANGE

20 - 48 m³/h

HEAD RANGE

322 - 568 m

MOTOR

74 kW


SPEED

3500 rpm

Specifications

Series	HP
Size	HP32
Stages	11
Mains frequency	60 Hz
Speed	3500 rpm
Motor power	74 kW
Max pressure	70 bar
Connection	PJE coupling
Weight	855 kg
Data basis	Published performance curve (Performance table, printed pp. 47–48)

Performance curve

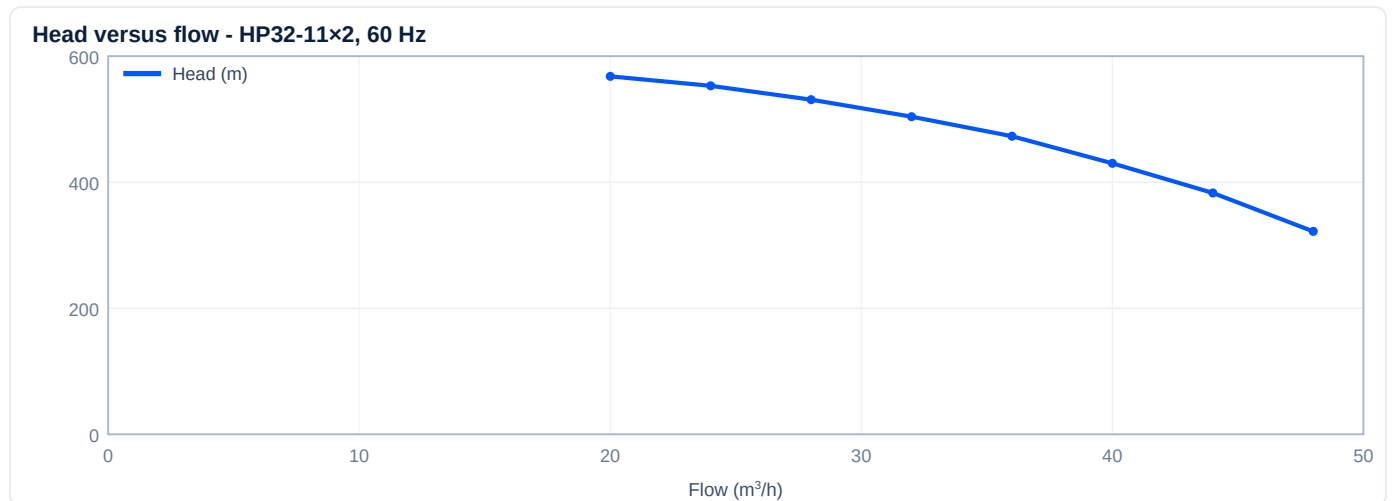

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	568
24	553
28	531
32	504



Flow (m³/h)	Head (m)
36	473
40	430
44	383
48	322

Dimensions (mm)

Code	Description	Value
L1	L1 — overall length	2026
L2	L2	734
L3	L3	830
L4	L4	830
L5	L5 — base length	1840
L6	L6 — motor length	946
L7	L7	530
L8	L8	860
L9	L9	880
L10	L10	925
H1	H1 — height	645
H2	H2 — axis height	340
-	Net weight	855

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-C008E. Contact: +92 345 9547419 sales@cnppakistan.com