

LDMF10-22

LDMF (hot water) | Vertical multistage centrifugal pump



CNP-M-001428

Scan to open this online



FLOW RANGE

5 - 14 m³/h

HEAD RANGE

139.5 - 243 m

MOTOR

11 kW

SPEED


2900 rpm

Specifications

Series	LDMF (hot water)
Size	LDMF10
Stages	22
Mains frequency	50 Hz
Speed	2900 rpm
Motor power	11 kW (15 hp)
Max pressure	25 bar
Connection	Flange DN40 / cutting ferrule DN50 / pipe thread R2 / oval flange G1½
Weight	169 kg
Data basis	Published performance curve (Performance table printed p. 12; dimensions p. 6)

Performance curve

Head versus flow - LDMF10-22, 50 Hz

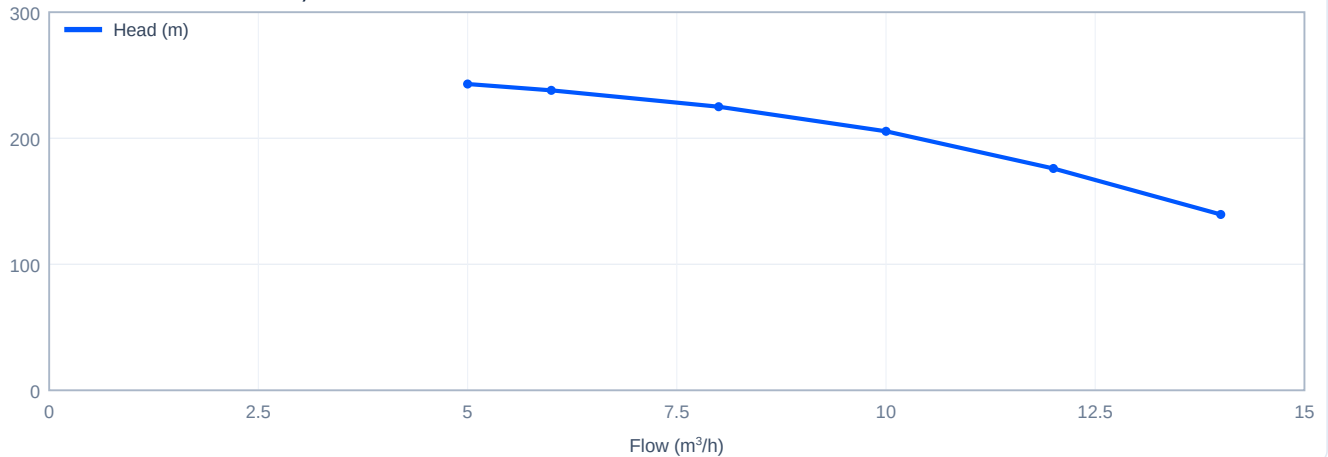

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
5	243
6	238
8	225
10	205.5



Flow (m³/h)	Head (m)
12	176
14	139.5

Dimensions (mm)

Code	Description	Value
H1	H1 — pump height	1025
H2	H2 — motor height	500
H	H — overall height, flange	1605
D1	D1 — motor diameter	330
D2	D2 — base / flange width	205
-	Net weight	169

Dimension codes follow the CNP catalogue drawing. Confirm installation dimensions with the approved drawing before civil or piping work.

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-AE98F. Contact: +92 345 9547419 sales@cnppakistan.com