

PQ120-10-2

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-000345

Scan to open this online



FLOW RANGE

60 - 150 m³/h

HEAD RANGE

157.5 - 215.5 m

MOTOR

90 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ120
Stages	10
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	90 kW (125 hp)
Max pressure	25 bar
Connection	Thread Rp6
Variant	2
Data basis	Published performance curve (Performance table, printed p. 9)

Performance curve

Head versus flow - PQ120-10-2, 50 Hz

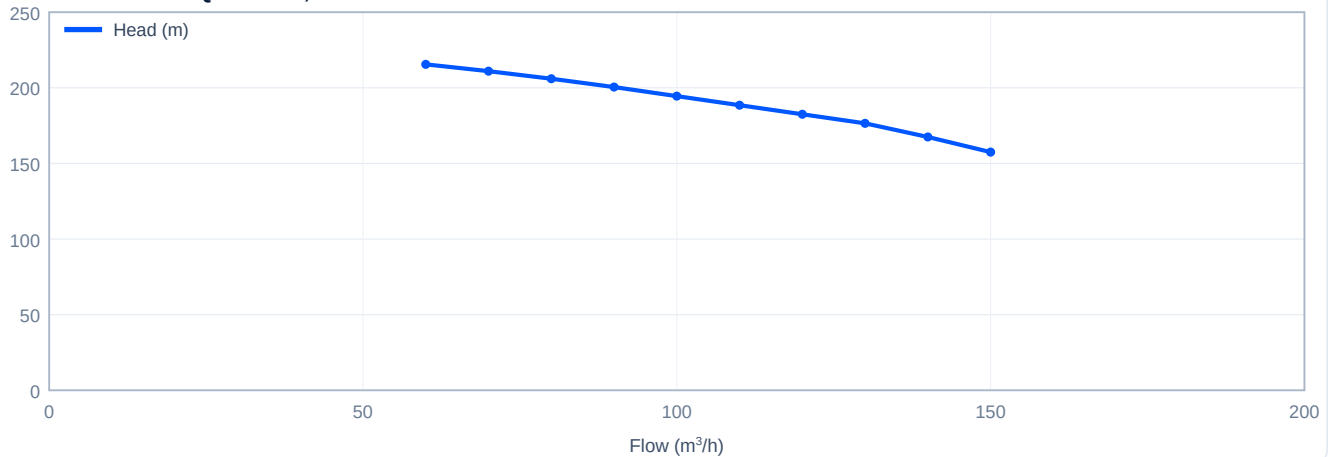

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
60	215.5
70	211
80	206
90	200.5



Flow (m³/h)	Head (m)
100	194.5
110	188.5
120	182.5
130	176.5
140	167.5
150	157.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-3CC56. Contact: +92 345 9547419 sales@cnppakistan.com