

PQ150-3

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001200

Scan to open this online



FLOW RANGE

80 - 180 m³/h

HEAD RANGE

54.5 - 74.5 m

MOTOR

37 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ150
Stages	3
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	37 kW (50 hp)
Max pressure	23 bar
Connection	Thread Rp6
Data basis	Published performance curve (Performance table, printed p. 10)

Performance curve

Head versus flow - PQ150-3, 50 Hz

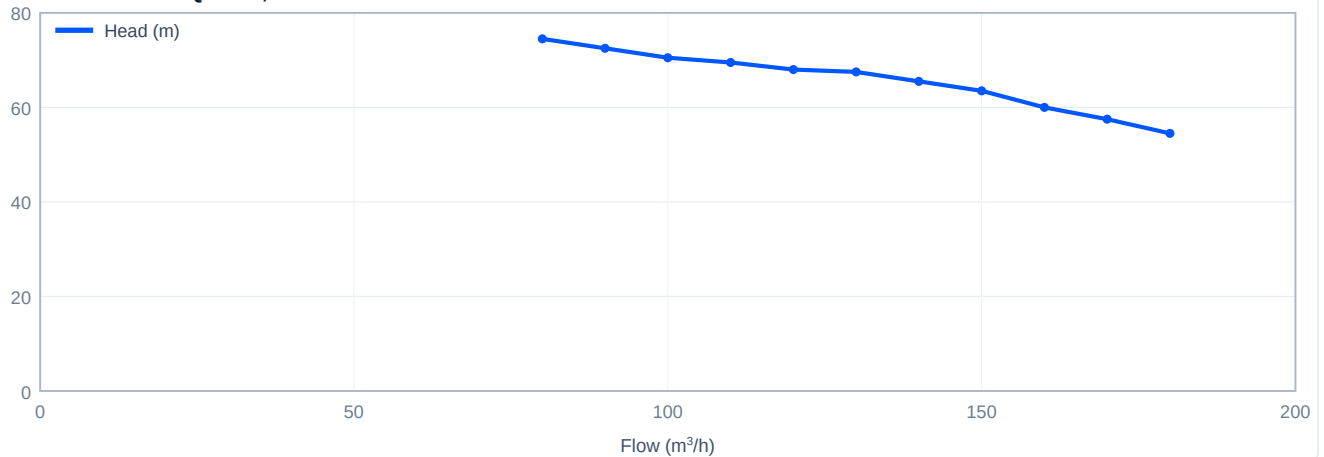

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
80	74.5
90	72.5
100	70.5
110	69.5
120	68



Flow (m³/h)	Head (m)
130	67.5
140	65.5
150	63.5
160	60
170	57.5
180	54.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-E96BD. Contact: +92 345 9547419 sales@cnppakistan.com