

PQ150-6-1

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001212

Scan to open this online



FLOW RANGE

80 - 180 m³/h

HEAD RANGE

103.5 - 144 m

MOTOR

75 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ150
Stages	6
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	75 kW (100 hp)
Max pressure	23 bar
Connection	Thread Rp6
Variant	1
Data basis	Published performance curve (Performance table, printed p. 10)

Performance curve

Head versus flow - PQ150-6-1, 50 Hz

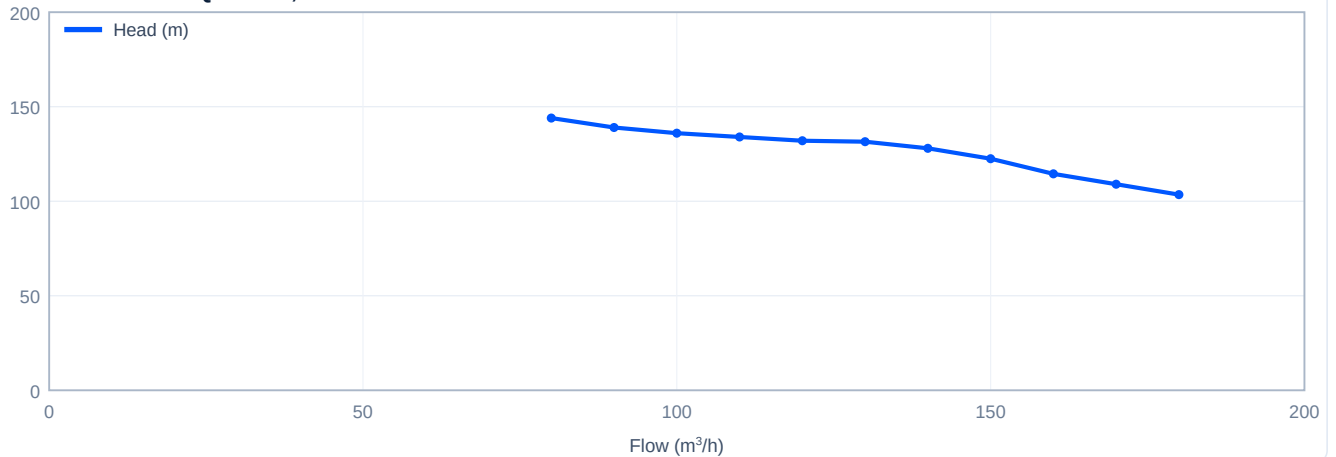

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
80	144
90	139
100	136
110	134



Flow (m³/h)	Head (m)
120	132
130	131.5
140	128
150	122.5
160	114.5
170	109
180	103.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-96221. Contact: +92 345 9547419 sales@cnppakistan.com