

PQ150-9-2

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001306

Scan to open this online



FLOW RANGE

80 - 180 m³/h

HEAD RANGE

152 - 213.5 m

MOTOR

110 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ150
Stages	9
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	110 kW (150 hp)
Max pressure	23 bar
Connection	Thread Rp6
Variant	2
Data basis	Published performance curve (Performance table, printed p. 10)

Performance curve

Head versus flow - PQ150-9-2, 50 Hz

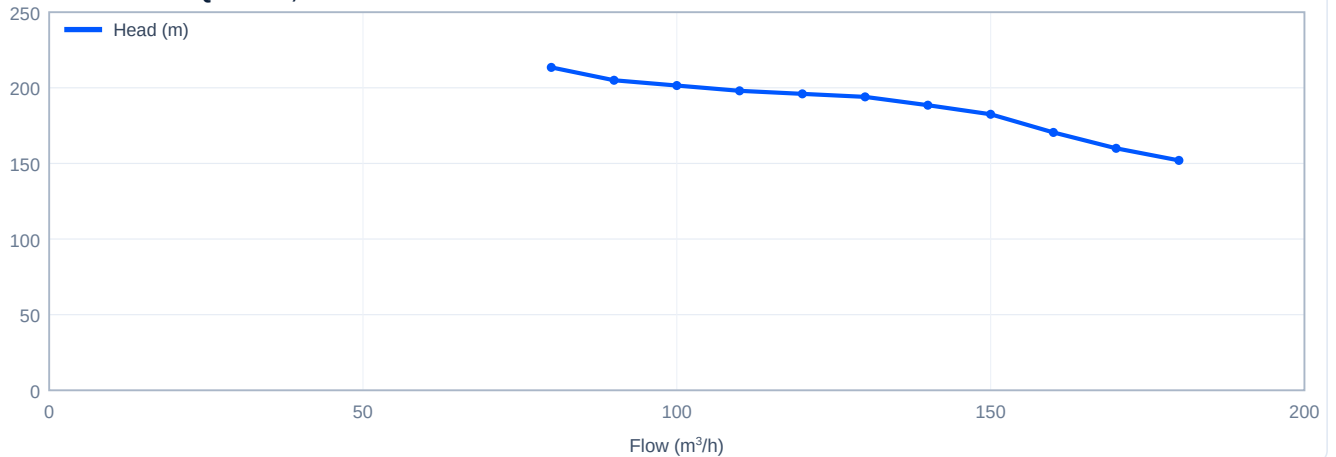

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
80	213.5
90	205
100	201.5
110	198



Flow (m³/h)	Head (m)
120	196
130	194
140	188.5
150	182.5
160	170.5
170	160
180	152

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-84347. Contact: +92 345 9547419 sales@cnppakistan.com