

PQ17-1

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001283

Scan to open this online



FLOW RANGE

4 - 22 m³/h

HEAD RANGE

4 - 10.5 m

MOTOR

0.55 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ17
Stages	1
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	26 bar
Connection	Thread Rp2½
Data basis	Published performance curve (Performance table, printed p. 6)

Performance curve

Head versus flow - PQ17-1, 50 Hz

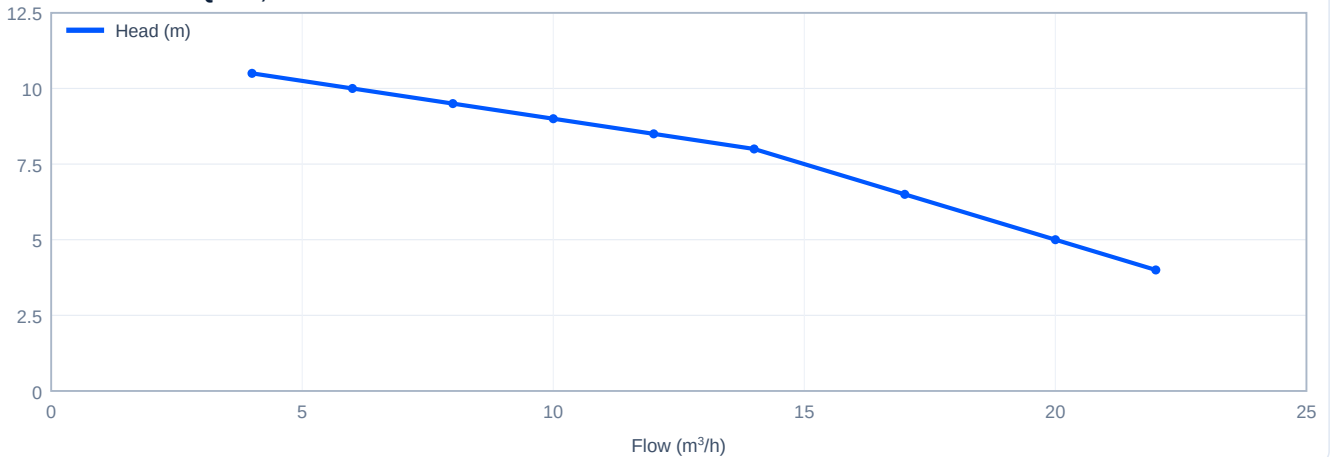

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	10.5
6	10
8	9.5
10	9
12	8.5



Flow (m³/h)	Head (m)
14	8
17	6.5
20	5
22	4

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-A98A9. Contact: +92 345 9547419 sales@cnppakistan.com