

PQ17-9

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-000463

Scan to open this online



FLOW RANGE

4 - 22 m³/h

HEAD RANGE

40 - 93 m

MOTOR

5.5 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ17
Stages	9
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	5.5 kW (7.5 hp)
Max pressure	26 bar
Connection	Thread Rp2½
Data basis	Published performance curve (Performance table, printed p. 6)

Performance curve

Head versus flow - PQ17-9, 50 Hz

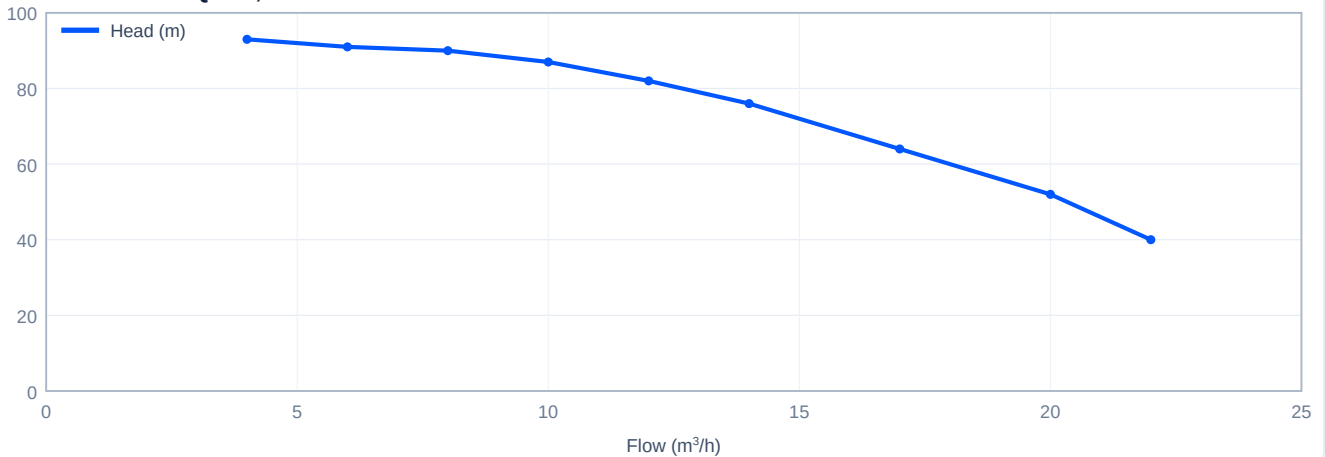

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	93
6	91
8	90
10	87
12	82



Flow (m³/h)	Head (m)
14	76
17	64
20	52
22	40

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-9CDA2. Contact: +92 345 9547419 sales@cnppakistan.com