

PQ3-38

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001284

Scan to open this online



FLOW RANGE

0.8 - 4 m³/h

HEAD RANGE

94 - 224 m

MOTOR

3 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ3
Stages	38
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	3 kW (4 hp)
Max pressure	25 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, printed p. 5)

Performance curve

Head versus flow - PQ3-38, 50 Hz

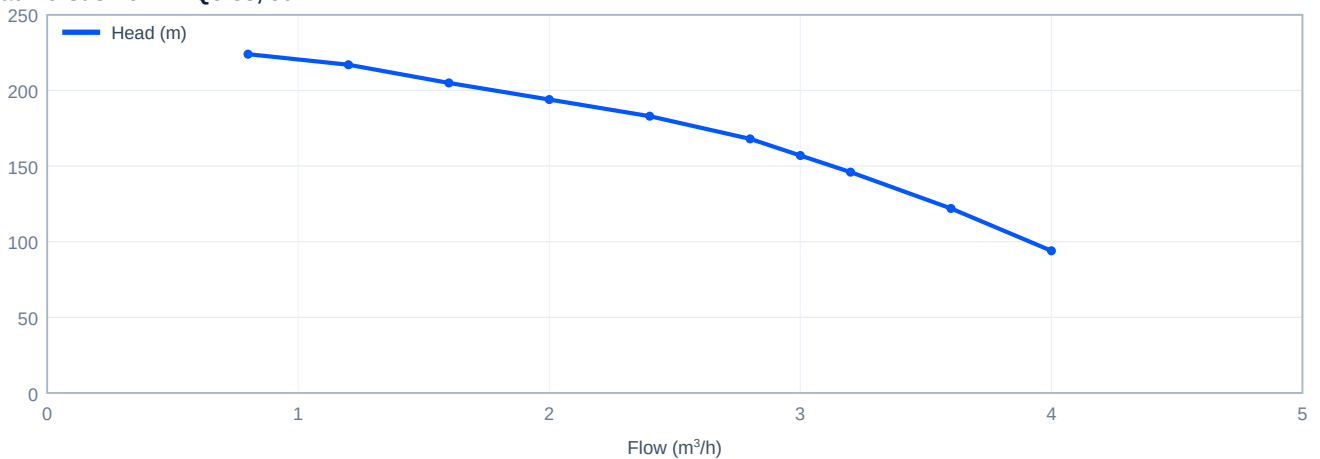

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.8	224
1.2	217
1.6	205
2.0	194
2.4	183



Flow (m³/h)	Head (m)
2.8	168
3	157
3.2	146
3.6	122
4	94

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-81C76. Contact: +92 345 9547419 sales@cnppakistan.com