

PQ30-18

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-000591

Scan to open this online



FLOW RANGE

5 - 38 m³/h

HEAD RANGE

81 - 201 m

MOTOR

18.5 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ30
Stages	18
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	18.5 kW (25 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, printed p. 7)

Performance curve

Head versus flow - PQ30-18, 50 Hz

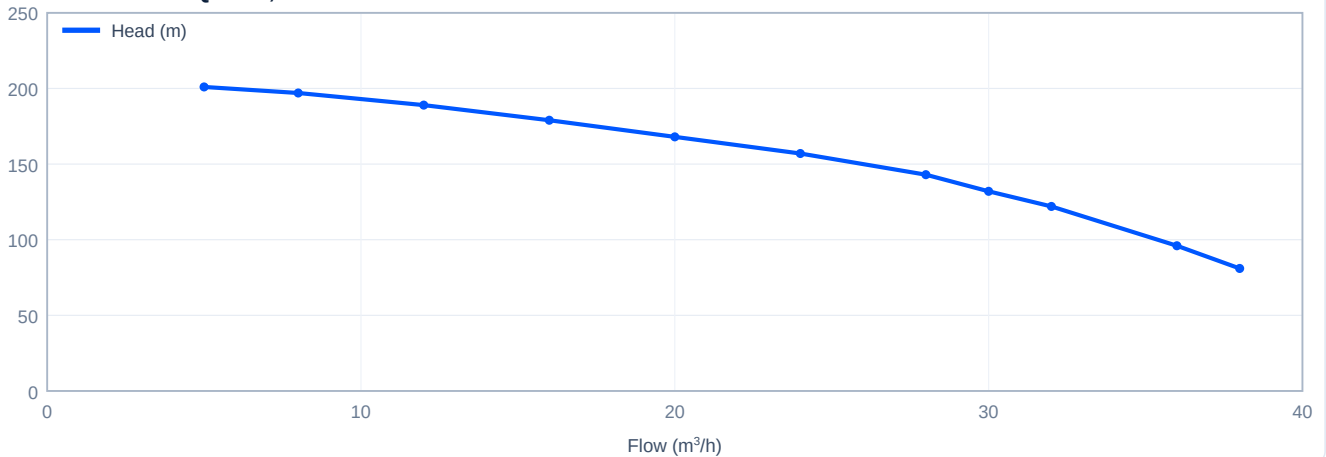

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
5	201
8	197
12	189
16	179
20	168



Flow (m³/h)	Head (m)
24	157
28	143
30	132
32	122
36	96
38	81

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-22FEB. Contact: +92 345 9547419 sales@cnppakistan.com