

PQ30-23

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001301

Scan to open this online



FLOW RANGE

5 - 38 m³/h

HEAD RANGE

104 - 258 m

MOTOR

22 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ30
Stages	23
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	22 kW (30 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, printed p. 7)

Performance curve

Head versus flow - PQ30-23, 50 Hz

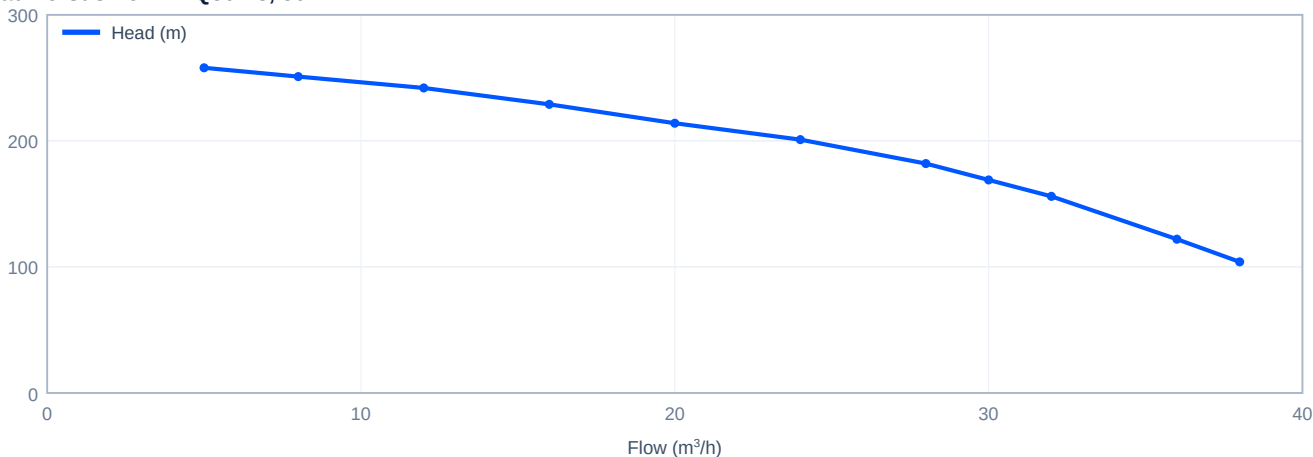

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
5	258
8	251
12	242
16	229
20	214



Flow (m³/h)	Head (m)
24	201
28	182
30	169
32	156
36	122
38	104

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-42B3A. Contact: +92 345 9547419 sales@cnppakistan.com