

PQ5-6

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-000338

Scan to open this online



FLOW RANGE

1 - 6.5 m³/h

HEAD RANGE

11 - 32 m

MOTOR

0.55 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ5
Stages	6
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	24 bar
Connection	Thread Rp1½
Data basis	Published performance curve (Performance table, printed p. 5)

Performance curve

Head versus flow - PQ5-6, 50 Hz

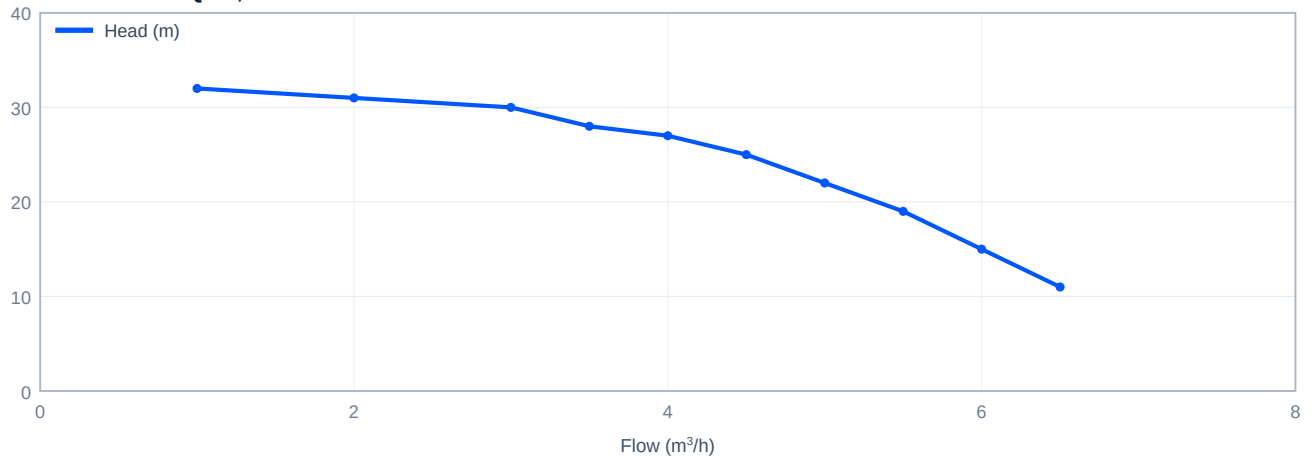

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
1	32
2	31
3	30
3.5	28
4	27



Flow (m³/h)	Head (m)
4.5	25
5	22
5.5	19
6	15
6.5	11

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-D0350. Contact: +92 345 9547419 sales@cnppakistan.com