

PQ60-8-2

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001034

Scan to open this online



FLOW RANGE

20 - 75 m³/h

HEAD RANGE

31 - 99 m

MOTOR

13 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ60
Stages	8
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	13 kW (17.5 hp)
Max pressure	29 bar
Connection	Thread Rp4
Variant	2
Data basis	Published performance curve (Performance table, printed p. 8)

Performance curve

Head versus flow - PQ60-8-2, 50 Hz

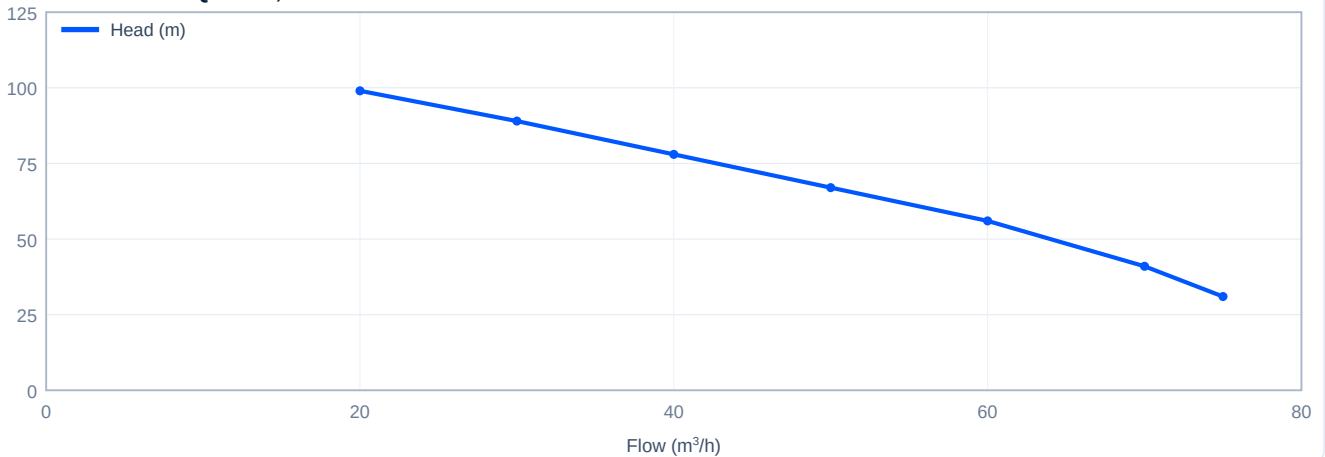

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
20	99
30	89
40	78
50	67



Flow (m³/h)	Head (m)
60	56
70	41
75	31

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-01EAF. Contact: +92 345 9547419 sales@cnppakistan.com