CNP PUMPS PAKISTAN

PQ75-6

PQ (submersible multistage) | Submersible multistage stainless steel pump

CNP-M-000509

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
30 - 100 m³/h	**47 - 111 m**	**22 kW**	**2850 rpm**

Specifications

Series	**PQ (submersible multistage)**
Size	**PQ75**
Stages	**6**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**22 kW (30 hp)**
Max pressure	**38 bar**
Connection	**Thread Rp5**
Data basis	**Published performance curve (Performance table, printed p. 8)**

Performance curve

Head versus flow - PQ75-6, 50 Hz

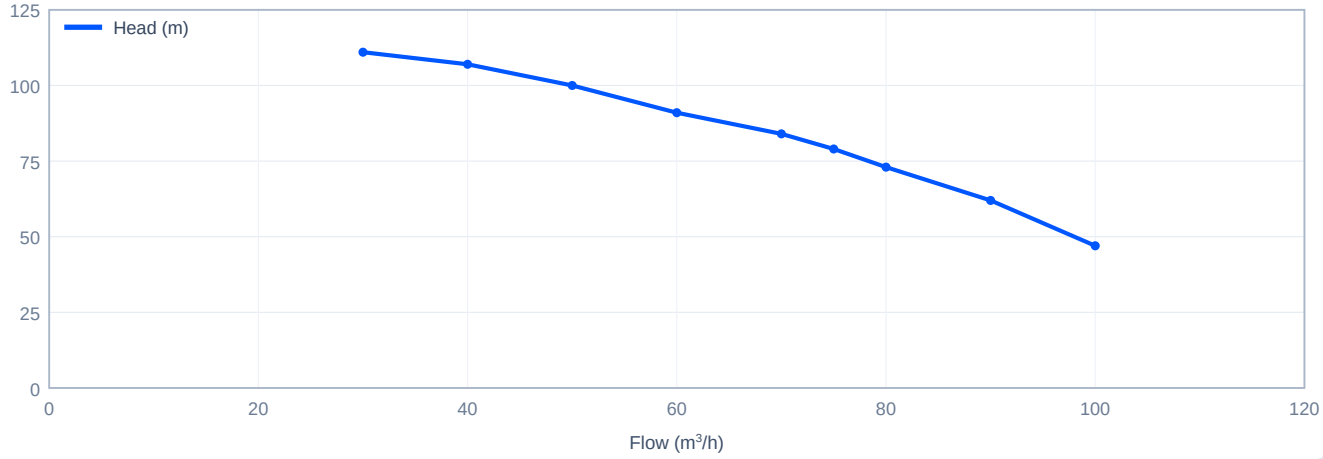

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
30	111
40	107
50	100
60	91
70	84

Flow (m^3/h)	Head (m)
75	79
80	73
90	62
100	47

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261027-95FB8. Contact: +92 345 9547419 sales@cnppakistan.com