

PQ8-25

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001285

Scan to open this online



FLOW RANGE

2 - 11 m³/h

HEAD RANGE

56 - 135 m

MOTOR

4 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ8
Stages	25
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	4 kW (5.5 hp)
Max pressure	27 bar
Connection	Thread Rp2
Data basis	Published performance curve (Performance table, printed p. 6)

Performance curve

Head versus flow - PQ8-25, 50 Hz

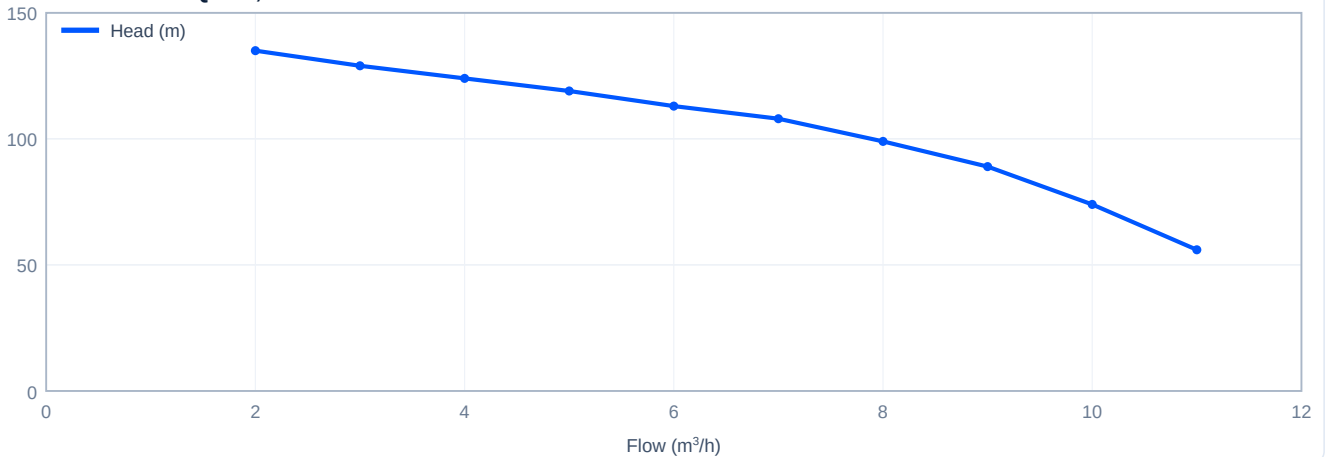

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
2	135
3	129
4	124
5	119
6	113



Flow (m³/h)	Head (m)
7	108
8	99
9	89
10	74
11	56

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-00F2A. Contact: +92 345 9547419 sales@cnppakistan.com