

PQ95-9

PQ (submersible multistage) | Submersible multistage stainless steel pump



CNP-M-001258

Scan to open this online



FLOW RANGE

40 - 120 m³/h

HEAD RANGE

31 - 167 m

MOTOR

37 kW

SPEED


2850 rpm

Specifications

Series	PQ (submersible multistage)
Size	PQ95
Stages	9
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	37 kW (50 hp)
Max pressure	34 bar
Connection	Thread Rp5
Data basis	Published performance curve (Performance table, printed p. 9)

Performance curve

Head versus flow - PQ95-9, 50 Hz

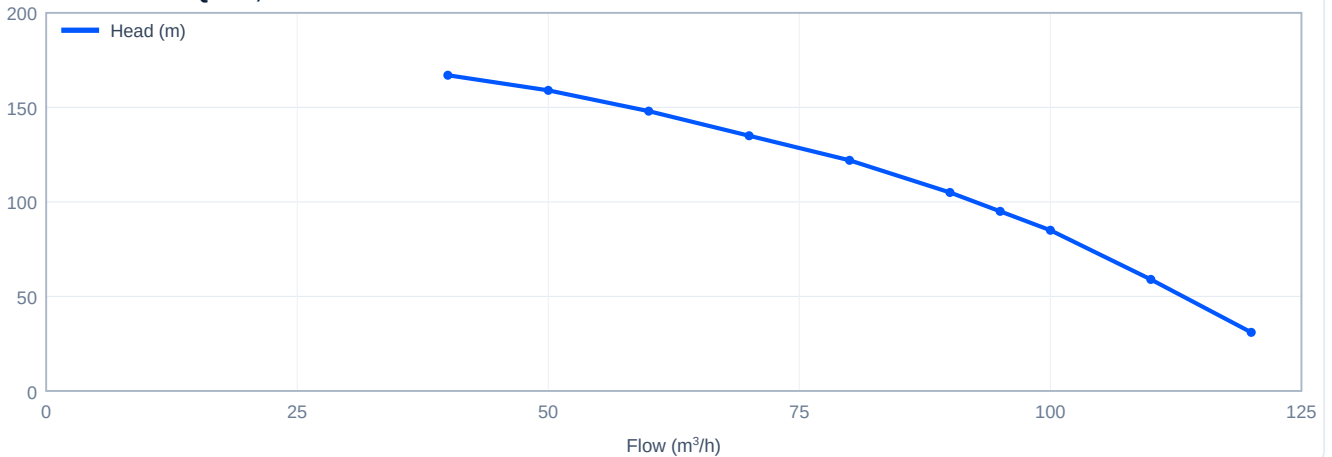

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	167
50	159
60	148
70	135
80	122



Flow (m³/h)	Head (m)
90	105
95	95
100	85
110	59
120	31

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-21845. Contact: +92 345 9547419 sales@cnppakistan.com