

SJ1-46

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001106

Scan to open this online



FLOW RANGE

0.2 - 2 m³/h

HEAD RANGE

151 - 260 m

MOTOR

2.2 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ1
Stages	46
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	2.2 kW (3 hp)
Max pressure	28 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 5))

Performance curve

Head versus flow - SJ1-46, 50 Hz

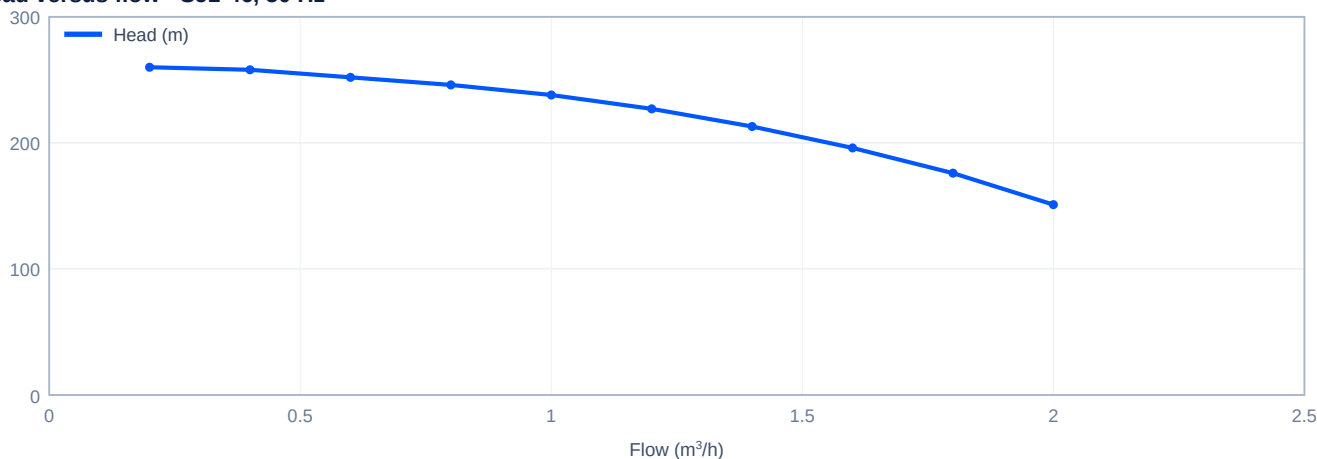

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.2	260
0.4	258
0.6	252
0.8	246
1	238



Flow (m³/h)	Head (m)
1.2	227
1.4	213
1.6	196
1.8	176
2	151

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-D07D3. Contact: +92 345 9547419 sales@cnppakistan.com