

SJ12-10

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001444

Scan to open this online



FLOW RANGE

3 - 18 m³/h

HEAD RANGE

27 - 67 m

MOTOR

3 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ12
Stages	10
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	3 kW (4 hp)
Max pressure	16 bar
Connection	Thread Rp2
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 9))

Performance curve

Head versus flow - SJ12-10, 50 Hz

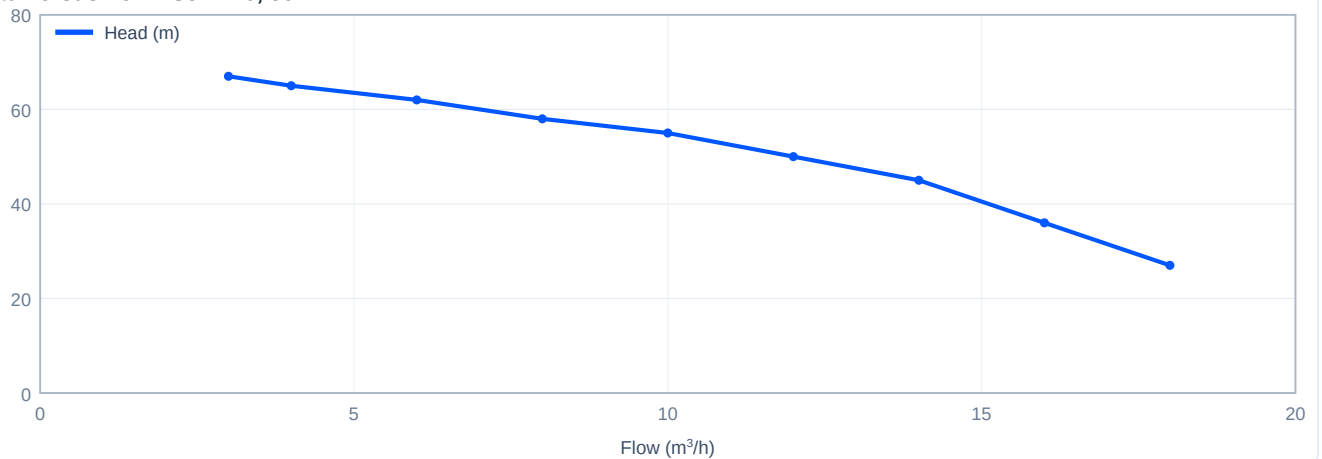

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
3	67
4	65
6	62
8	58
10	55



Flow (m³/h)	Head (m)
12	50
14	45
16	36
18	27

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-A3F40. Contact: +92 345 9547419 sales@cnppakistan.com