

SJ120-7-1

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001177

Scan to open this online



FLOW RANGE

60 - 150 m³/h

HEAD RANGE

112.5 - 153 m

MOTOR

63 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ120
Stages	7
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	63 kW (85 hp)
Max pressure	25 bar
Connection	Thread Rp6
Variant	1
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 16))

Performance curve

Head versus flow - SJ120-7-1, 50 Hz

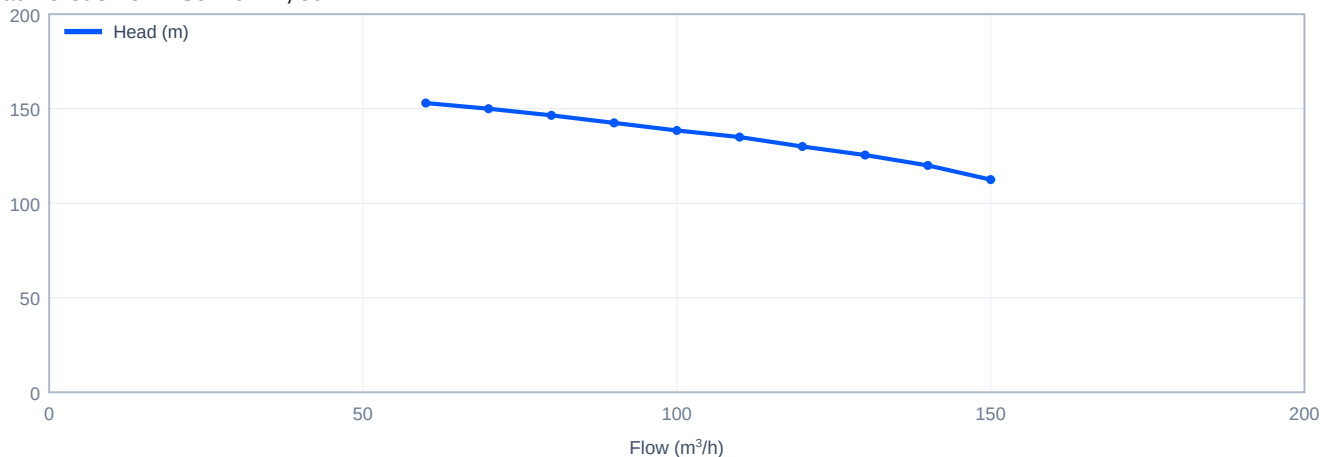

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
60	153
70	150
80	146.5
90	142.5



Flow (m³/h)	Head (m)
100	138.5
110	135
120	130
130	125.5
140	120
150	112.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-3F90C. Contact: +92 345 9547419 sales@cnppakistan.com