

SJ150-2-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001090

Scan to open this online



FLOW RANGE

80 - 180 m³/h

HEAD RANGE

25 - 35.5 m

MOTOR

18.5 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ150
Stages	2
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	18.5 kW (25 hp)
Max pressure	23 bar
Connection	Thread Rp6
Variant	2
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 17))

Performance curve

Head versus flow - SJ150-2-2, 50 Hz

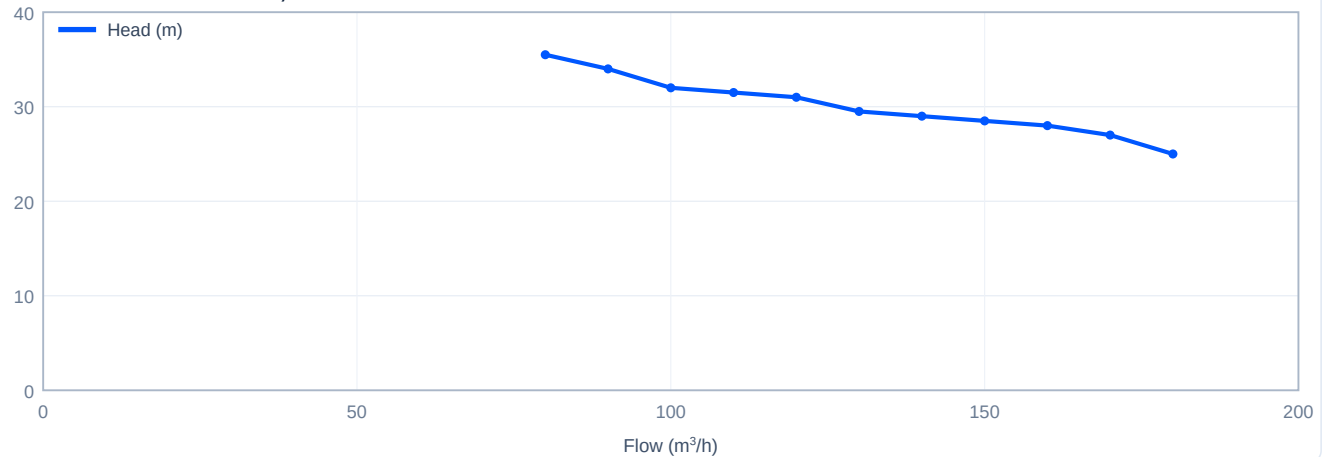

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
80	35.5
90	34
100	32
110	31.5



Flow (m³/h)	Head (m)
120	31
130	29.5
140	29
150	28.5
160	28
170	27
180	25

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-BEC6A. Contact: +92 345 9547419 sales@cnppakistan.com