

SJ150-5-1

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001469

Scan to open this online



FLOW RANGE

80 - 180 m³/h

HEAD RANGE

85 - 118.5 m

MOTOR

55 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ150
Stages	5
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	55 kW (75 hp)
Max pressure	23 bar
Connection	Thread Rp6
Variant	1
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 17))

Performance curve

Head versus flow - SJ150-5-1, 50 Hz

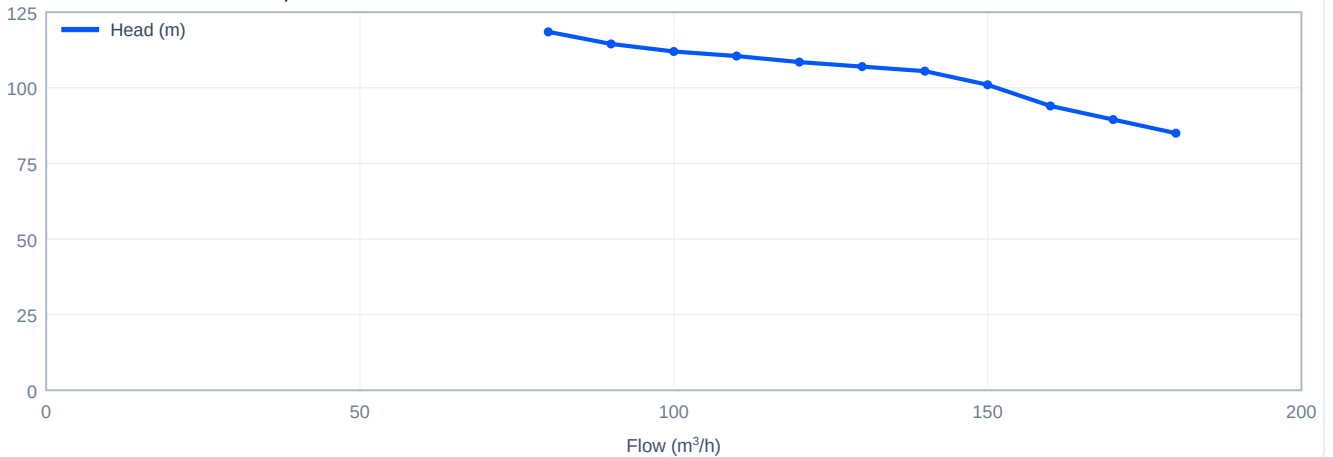

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
80	118.5
90	114.5
100	112
110	110.5



Flow (m³/h)	Head (m)
120	108.5
130	107
140	105.5
150	101
160	94
170	89.5
180	85

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-10429. Contact: +92 345 9547419 sales@cnppakistan.com