

SJ17-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001675

Scan to open this online



FLOW RANGE

4 - 22 m³/h

HEAD RANGE

8 - 20.5 m

MOTOR

1.1 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ17
Stages	2
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	26 bar
Connection	Thread Rp2½
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 10))

Performance curve

Head versus flow - SJ17-2, 50 Hz

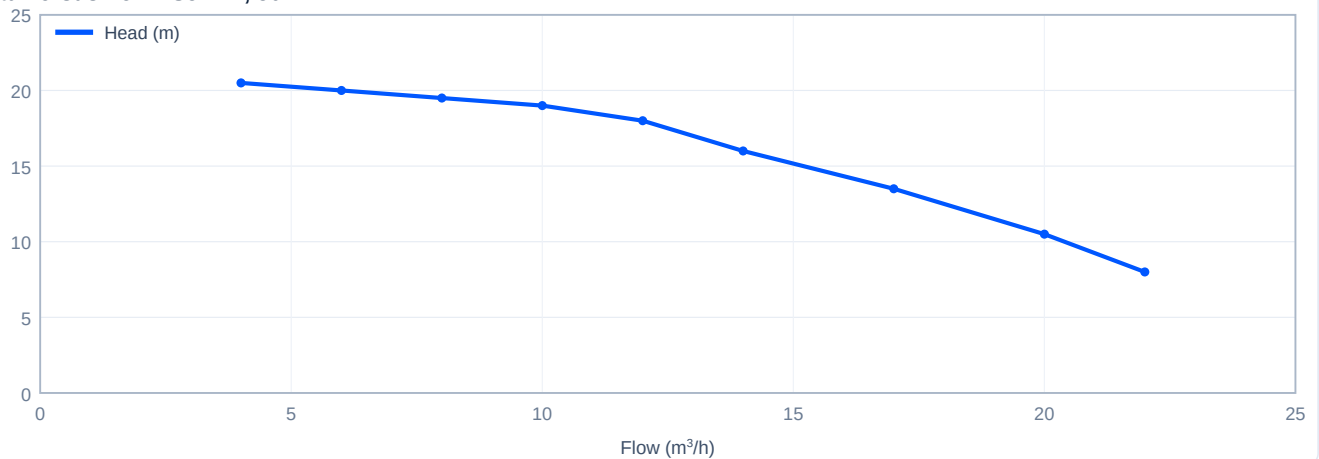

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	20.5
6	20
8	19.5
10	19
12	18



Flow (m³/h)	Head (m)
14	16
17	13.5
20	10.5
22	8

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-0C9DA. Contact: +92 345 9547419 sales@cnppakistan.com