

SJ17-24

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-000848

Scan to open this online



FLOW RANGE

4 - 22 m³/h

HEAD RANGE

113 - 245 m

MOTOR

13 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ17
Stages	24
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	13 kW (17.5 hp)
Max pressure	26 bar
Connection	Thread Rp2½
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 10))

Performance curve

Head versus flow - SJ17-24, 50 Hz

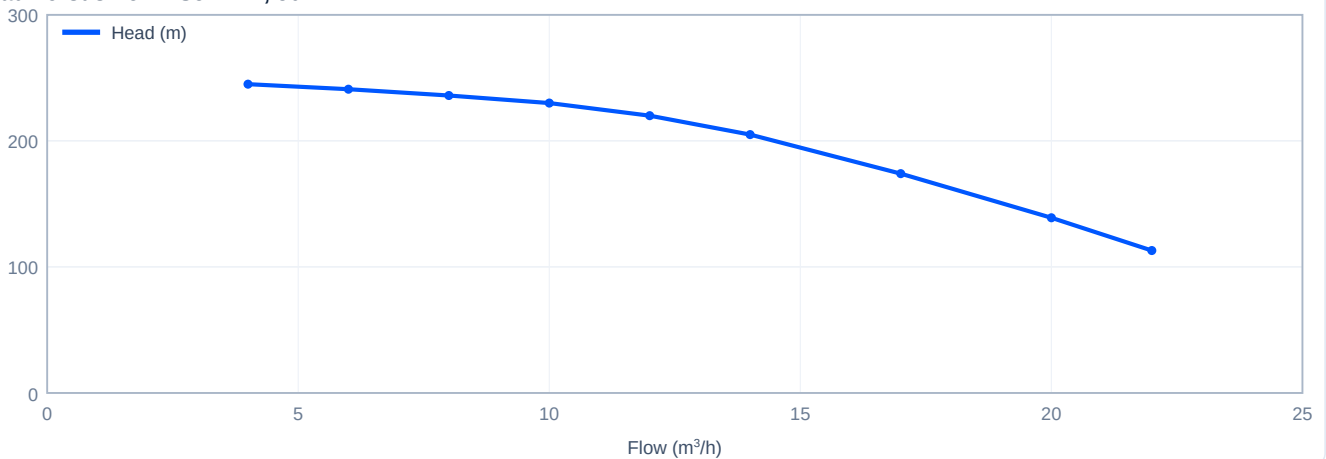

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	245
6	241
8	236
10	230
12	220



Flow (m³/h)	Head (m)
14	205
17	174
20	139
22	113

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-D86B0. Contact: +92 345 9547419 sales@cnppakistan.com