

SJ200-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001841

Scan to open this online



FLOW RANGE

100 - 240 m³/h

HEAD RANGE

59.5 - 76 m

MOTOR

55 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ200
Stages	2
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	55 kW (75 hp)
Max pressure	16 bar
Connection	Thread Rp6
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 18))

Performance curve

Head versus flow - SJ200-2, 50 Hz

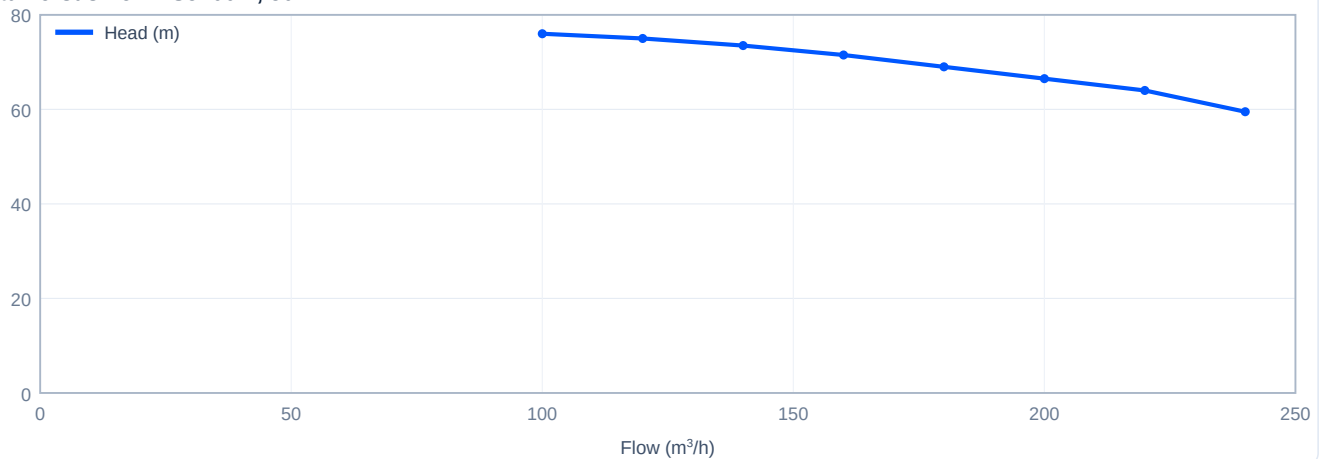

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
100	76
120	75
140	73.5
160	71.5
180	69



Flow (m³/h)	Head (m)
200	66.5
220	64
240	59.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-FBF30. Contact: +92 345 9547419 sales@cnppakistan.com