

SJ200-3-2B

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001482

Scan to open this online



FLOW RANGE

100 - 240 m³/h

HEAD RANGE

63 - 88.5 m

MOTOR

75 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ200
Stages	3
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	75 kW (100 hp)
Max pressure	16 bar
Connection	Thread Rp6
Variant	2B
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 18))

Performance curve

Head versus flow - SJ200-3-2B, 50 Hz

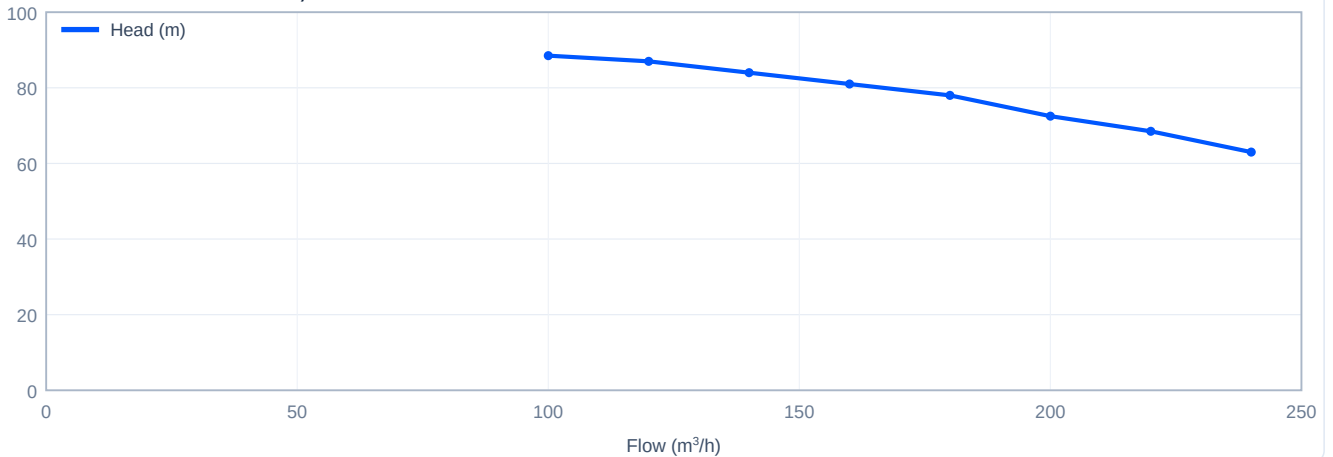

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
100	88.5
120	87
140	84
160	81



Flow (m³/h)	Head (m)
180	78
200	72.5
220	68.5
240	63

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-622A8. Contact: +92 345 9547419 sales@cnppakistan.com