

SJ3-18

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001836

Scan to open this online



FLOW RANGE

0.8 - 4 m³/h

HEAD RANGE

42 - 105 m

MOTOR

1.1 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ3
Stages	18
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	25 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 6))

Performance curve

Head versus flow - SJ3-18, 50 Hz

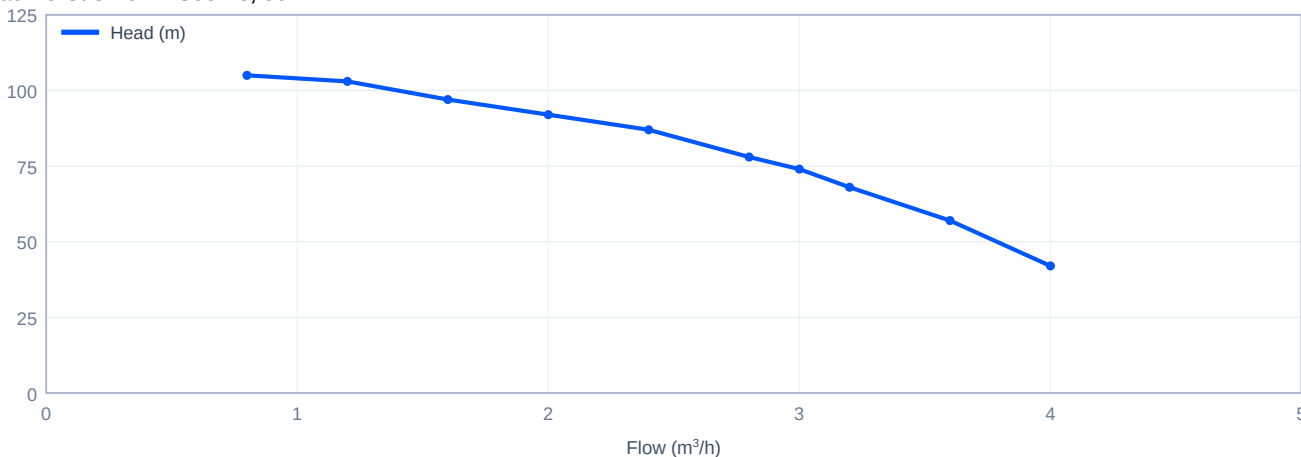

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.8	105
1.2	103
1.6	97
2	92
2.4	87



Flow (m³/h)	Head (m)
2.8	78
3	74
3.2	68
3.6	57
4	42

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-6A920. Contact: +92 345 9547419 sales@cnppakistan.com