

SJ3-43

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001707

Scan to open this online



FLOW RANGE

0.8 - 4 m³/h

HEAD RANGE

107 - 254 m

MOTOR

3 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ3
Stages	43
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	3 kW (4 hp)
Max pressure	25 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 6))

Performance curve

Head versus flow - SJ3-43, 50 Hz

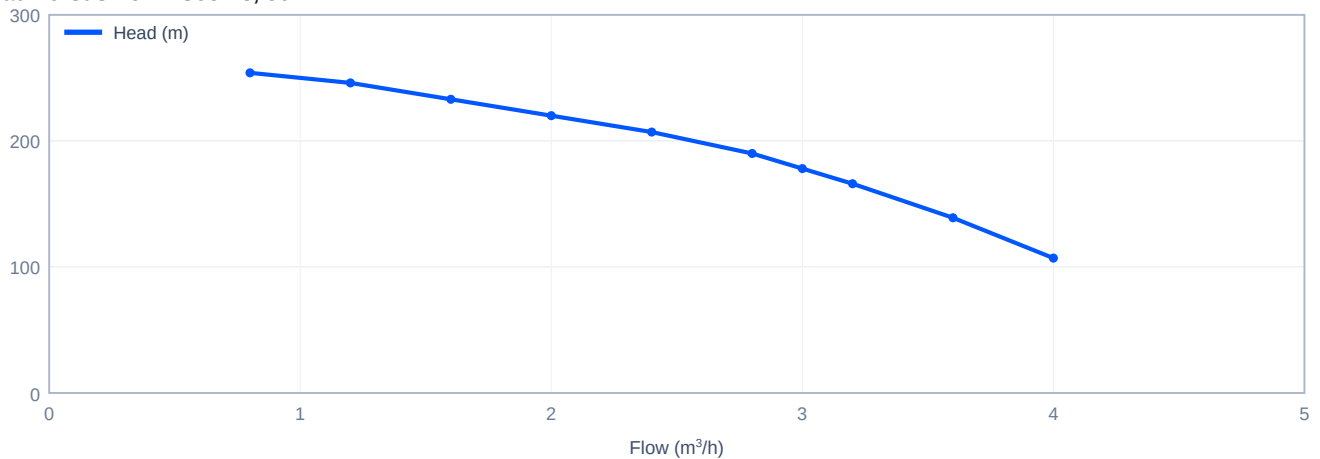

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.8	254
1.2	246
1.6	233
2.0	220
2.4	207



Flow (m³/h)	Head (m)
2.8	190
3	178
3.2	166
3.6	139
4	107

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-1DED4. Contact: +92 345 9547419 sales@cnppakistan.com