

# SJ30-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001829

Scan to open this online



FLOW RANGE

5 - 38 m<sup>3</sup>/h

HEAD RANGE

9 - 22.5 m

MOTOR

2.2 kW

SPEED


2850 rpm

## Specifications

|                 |                                                                           |
|-----------------|---------------------------------------------------------------------------|
| Series          | SJ (deep-well submersible)                                                |
| Size            | SJ30                                                                      |
| Stages          | 2                                                                         |
| Mains frequency | 50 Hz                                                                     |
| Speed           | 2850 rpm                                                                  |
| Motor power     | 2.2 kW (3 hp)                                                             |
| Max pressure    | 28 bar                                                                    |
| Connection      | Thread Rp3                                                                |
| Data basis      | Published performance curve (Performance table, SJ size page (PDF p. 11)) |

## Performance curve

Head versus flow - SJ30-2, 50 Hz

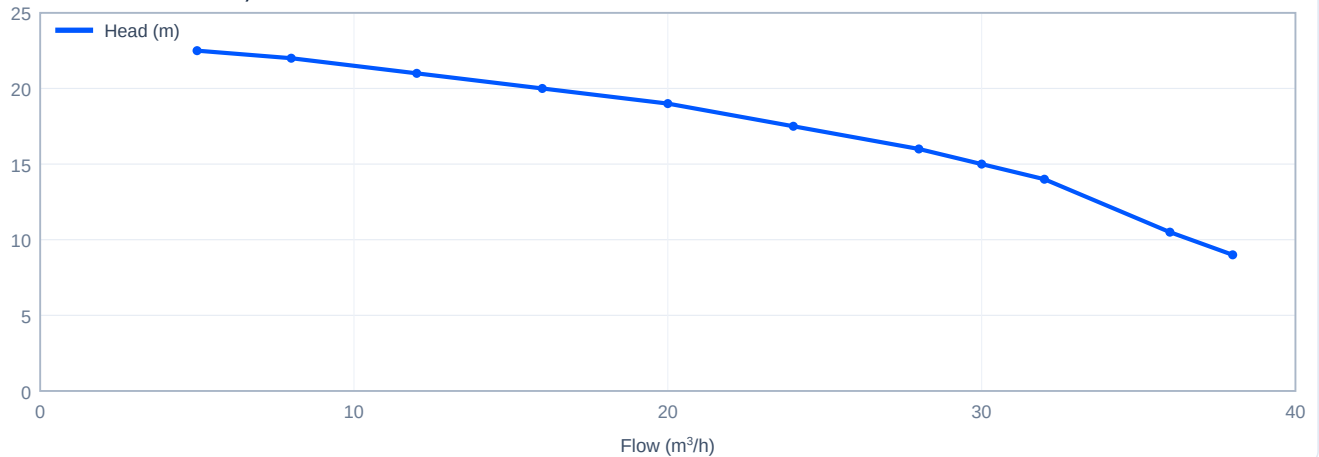

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

## Performance table

| Flow (m <sup>3</sup> /h) | Head (m) |
|--------------------------|----------|
| 5                        | 22.5     |
| 8                        | 22       |
| 12                       | 21       |
| 16                       | 20       |
| 20                       | 19       |



| Flow (m³/h) | Head (m) |
|-------------|----------|
| 24          | 17.5     |
| 28          | 16       |
| 30          | 15       |
| 32          | 14       |
| 36          | 10.5     |
| 38          | 9        |

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-01F2F. Contact: +92 345 9547419 sales@cnppakistan.com