CNP PUMPS PAKISTAN

SJ30-21

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001410

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
5 - 38 m³/h	**95 - 235 m**	**18.5 kW**	**2850 rpm**

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ30**
Stages	**21**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**18.5 kW (25 hp)**
Max pressure	**28 bar**
Connection	**Thread Rp3**
Data basis	**Published performance curve (Performance table, SJ size page (PDF p. 11))**

Performance curve

Head versus flow - SJ30-21, 50 Hz

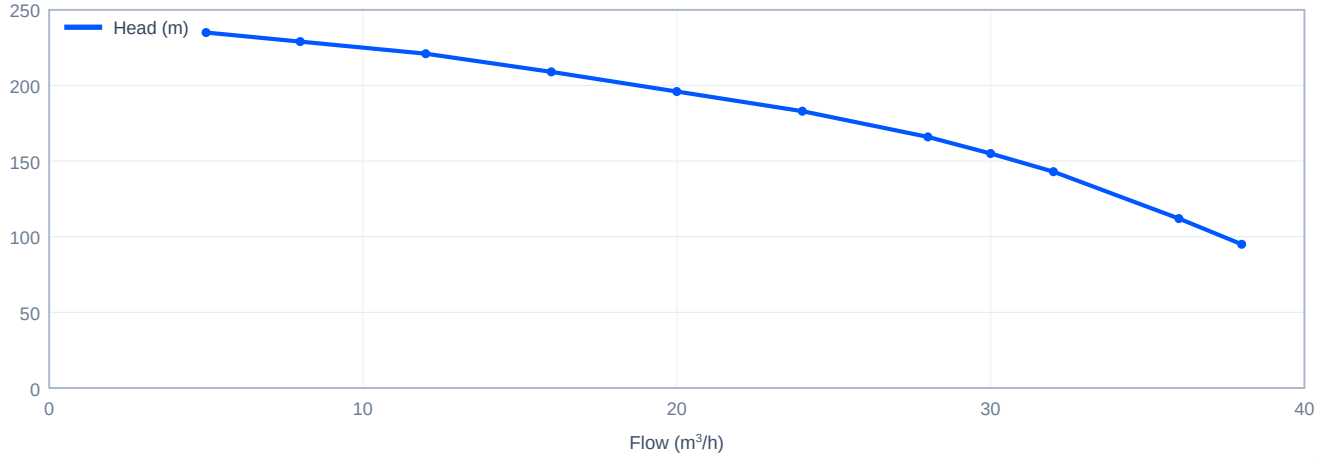

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
5	235
8	229
12	221
16	209
20	196

Flow (m^3/h)	Head (m)
24	183
28	166
30	155
32	143
36	112
38	95

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-18792. Contact: +92 345 9547419 sales@cnppakistan.com