

SJ42-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001766

Scan to open this online



FLOW RANGE

5 - 60 m³/h

HEAD RANGE

8.5 - 26 m

MOTOR

3 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ42
Stages	2
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	3 kW (4 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 12))

Performance curve

Head versus flow - SJ42-2, 50 Hz

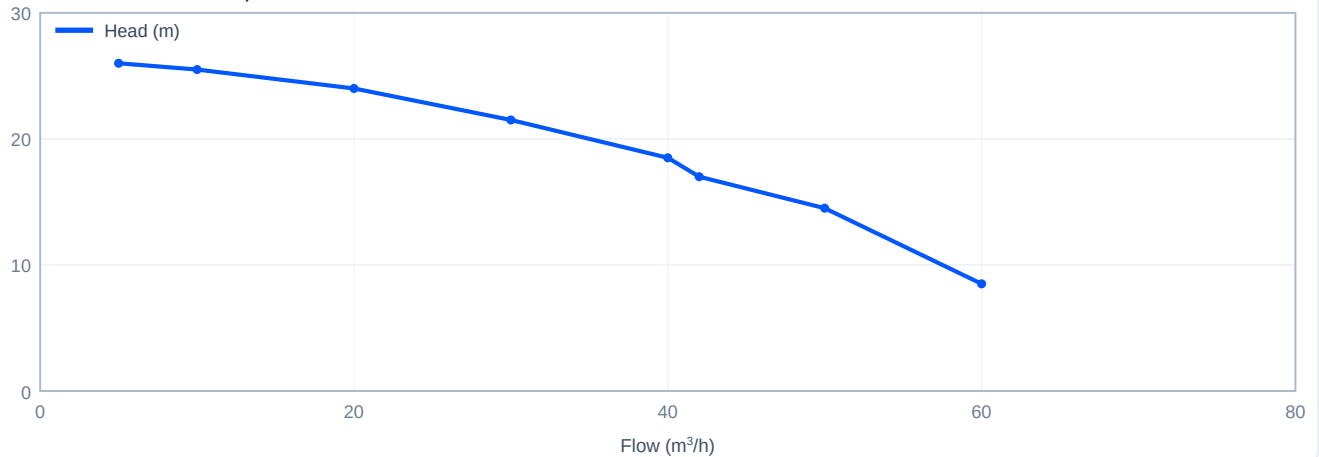

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
5	26
10	25.5
20	24
30	21.5
40	18.5



Flow (m³/h)	Head (m)
42	17
50	14.5
60	8.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-06A49. Contact: +92 345 9547419 sales@cnppakistan.com