CNP PUMPS PAKISTAN

SJ5-12

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001113

Scan to open this online


FLOW RANGE	HEAD RANGE	MOTOR	SPEED
1 - 6.5 m³/h	23 - 66 m	1.1 kW	2850 rpm

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ5**
Stages	**12**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**1.1 kW (1.5 hp)**
Max pressure	**24 bar**
Connection	**Thread Rp1½**
Data basis	**Published performance curve (Performance table, SJ size page (PDF p. 7))**

Performance curve

Head versus flow - SJ5-12, 50 Hz

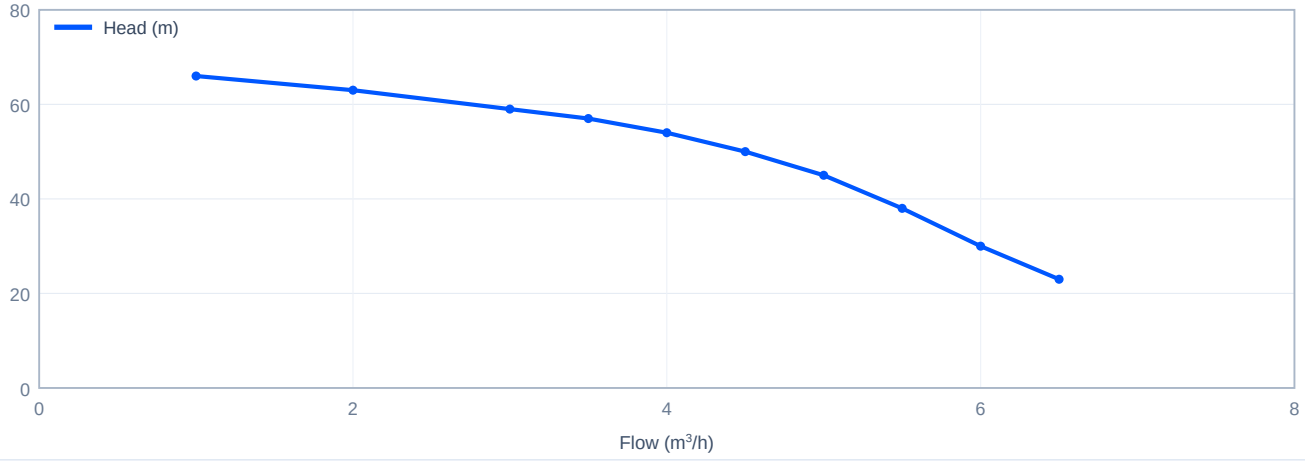

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
1	66
2	63
3	59
3.5	57
4	54

Flow (m^3/h)	Head (m)
4.5	50
5	45
5.5	38
6	30
6.5	23

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-788D0. Contact: +92 345 9547419 sales@cnppakistan.com