

SJ5-12

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001113

Scan to open this online



FLOW RANGE

1 - 6.5 m³/h

HEAD RANGE

23 - 66 m

MOTOR

1.1 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ5
Stages	12
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	1.1 kW (1.5 hp)
Max pressure	24 bar
Connection	Thread Rp1½
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 7))

Performance curve

Head versus flow - SJ5-12, 50 Hz

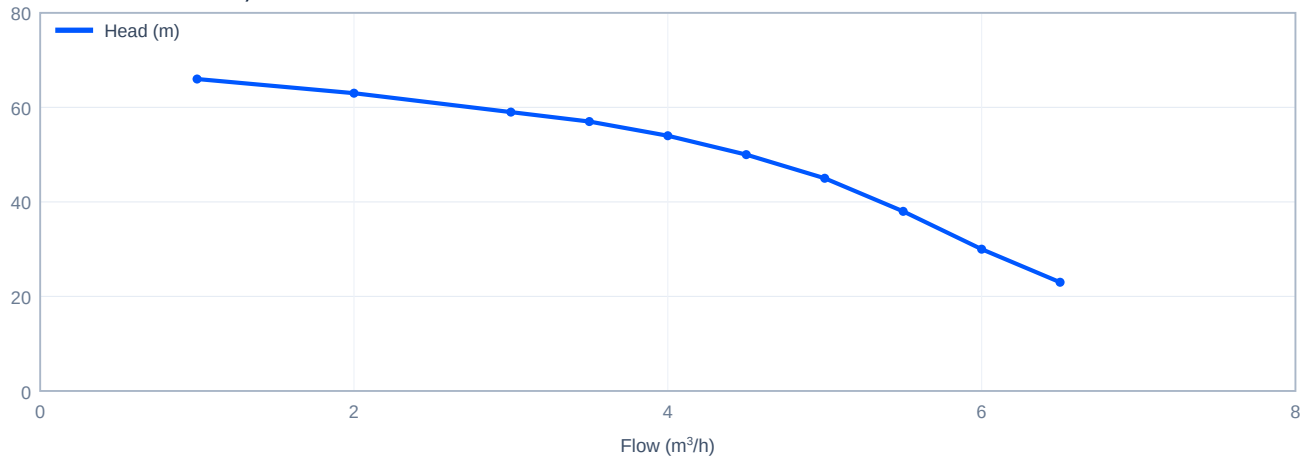

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
1	66
2	63
3	59
3.5	57
4	54



Flow (m³/h)	Head (m)
4.5	50
5	45
5.5	38
6	30
6.5	23

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-788D0. Contact: +92 345 9547419 sales@cnppakistan.com