CNP PUMPS PAKISTAN

SJ8-30

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001685

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
2 - 11 m³/h	**67 - 162 m**	**5.5 kW**	**2850 rpm**

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ8**
Stages	**30**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**5.5 kW (7.5 hp)**
Max pressure	**27 bar**
Connection	**Thread Rp2**
Data basis	**Published performance curve (Performance table, SJ size page (PDF p. 8))**

Performance curve

Head versus flow - SJ8-30, 50 Hz

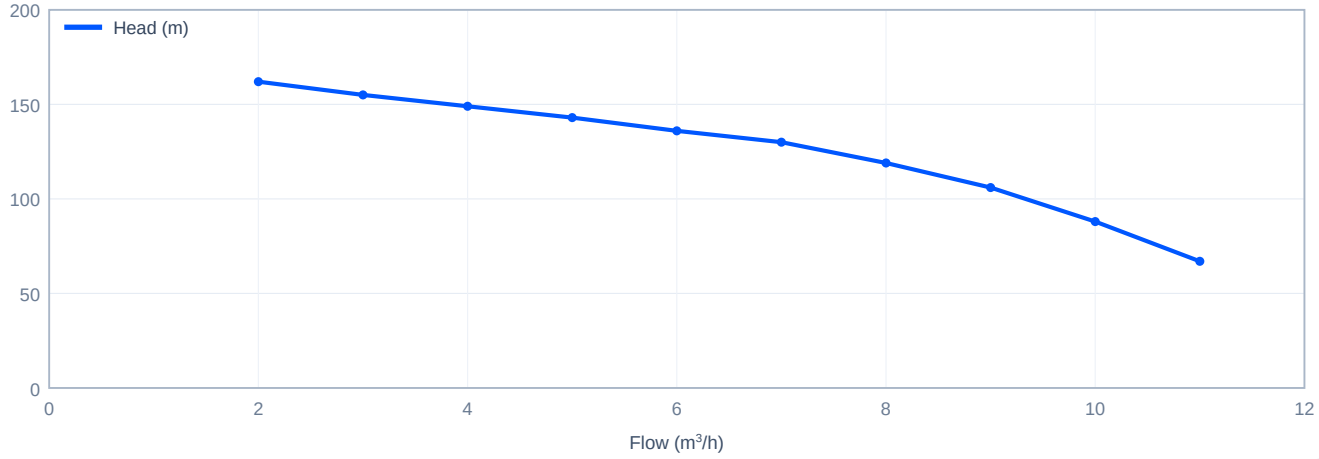

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
2	162
3	155
4	149
5	143
6	136

Flow (m^3/h)	Head (m)
7	130
8	119
9	106
10	88
11	67

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-3C156. Contact: +92 345 9547419 sales@cnppakistan.com