

SJ95-1

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001618

Scan to open this online



FLOW RANGE

40 - 110 m³/h

HEAD RANGE

5 - 17.5 m

MOTOR

4 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ95
Stages	1
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	4 kW (5.5 hp)
Max pressure	34 bar
Connection	Thread Rp5
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 15))

Performance curve

Head versus flow - SJ95-1, 50 Hz

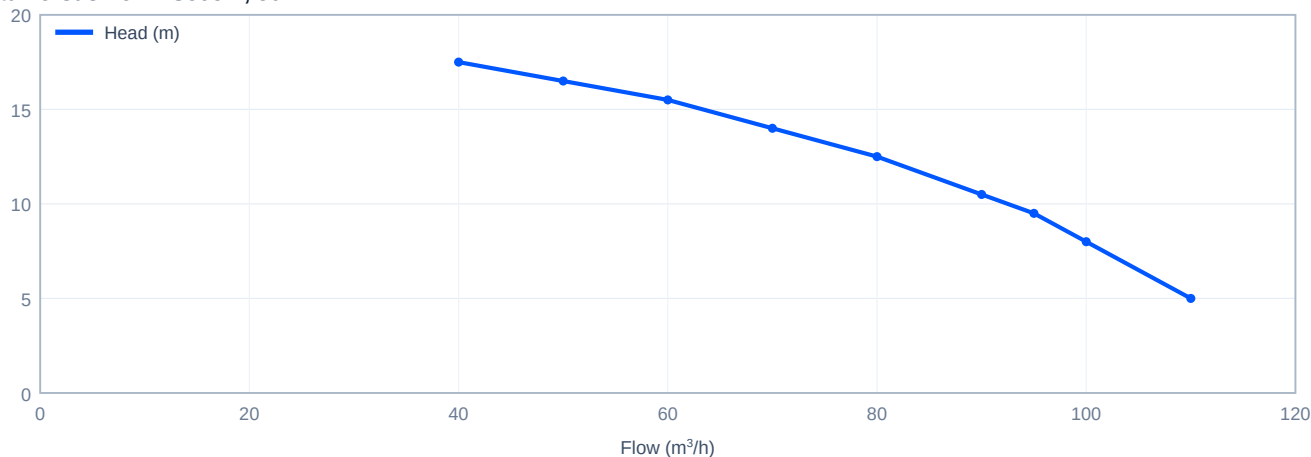

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	17.5
50	16.5
60	15.5
70	14
80	12.5



Flow (m³/h)	Head (m)
90	10.5
95	9.5
100	8
110	5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-D980F. Contact: +92 345 9547419 sales@cnppakistan.com