CNP PUMPS PAKISTAN

SJ95-13

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001099

Scan to open this online


FLOW RANGE	HEAD RANGE	MOTOR	SPEED
40 - 120 m³/h	53 - 243 m	55 kW	2850 rpm

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ95**
Stages	**13**
Mains frequency	**50 Hz**
Speed	**2850 rpm**
Motor power	**55 kW (75 hp)**
Max pressure	**34 bar**
Connection	**Thread Rp5**
Data basis	**Published performance curve (Performance table, SJ size page (PDF p. 15))**

Performance curve

Head versus flow - SJ95-13, 50 Hz

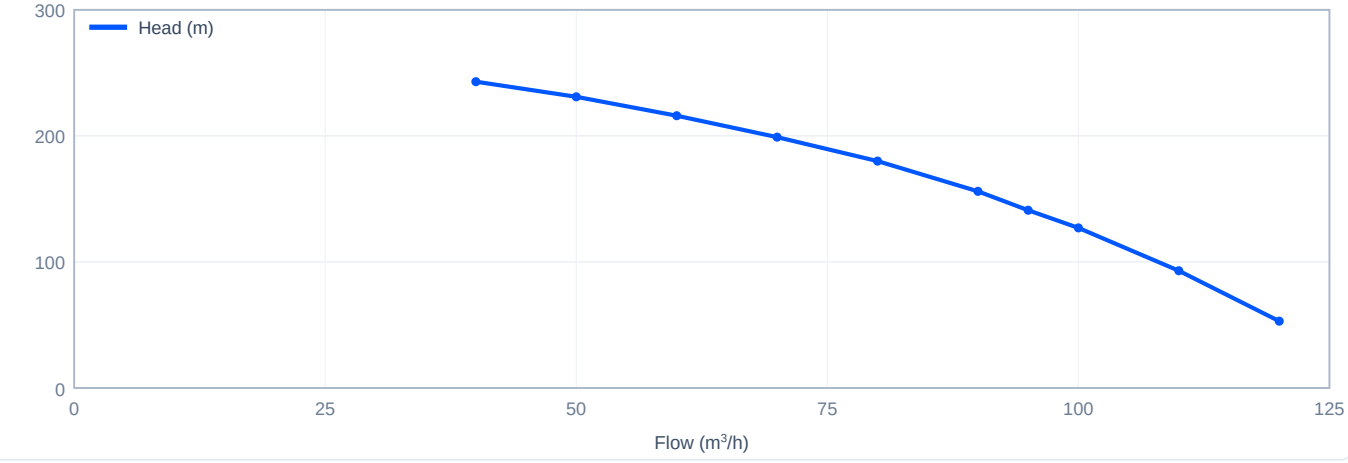

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
40	243
50	231
60	216
70	199
80	180

Flow (m^3/h)	Head (m)
90	156
95	141
100	127
110	93
120	53

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261030-C5834. Contact: +92 345 9547419 sales@cnppakistan.com