

SJ95-17

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001499

Scan to open this online



FLOW RANGE

40 - 120 m³/h

HEAD RANGE

75 - 321 m

MOTOR

75 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ95
Stages	17
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	75 kW (100 hp)
Max pressure	34 bar
Connection	Thread Rp5
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 15))

Performance curve

Head versus flow - SJ95-17, 50 Hz

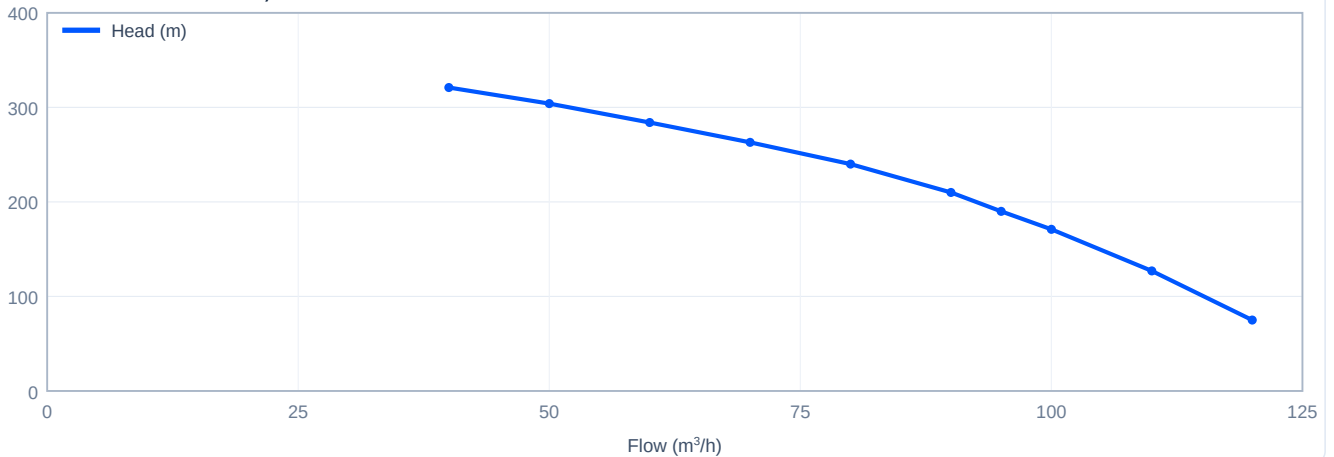

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	321
50	304
60	284
70	263
80	240



Flow (m³/h)	Head (m)
90	210
95	190
100	171
110	127
120	75

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-00B3D. Contact: +92 345 9547419 sales@cnppakistan.com