

SJ95-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001812

Scan to open this online



FLOW RANGE

40 - 120 m³/h

HEAD RANGE

3.5 - 36 m

MOTOR

9.2 kW

SPEED


2850 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ95
Stages	2
Mains frequency	50 Hz
Speed	2850 rpm
Motor power	9.2 kW (12.5 hp)
Max pressure	34 bar
Connection	Thread Rp5
Data basis	Published performance curve (Performance table, SJ size page (PDF p. 15))

Performance curve

Head versus flow - SJ95-2, 50 Hz

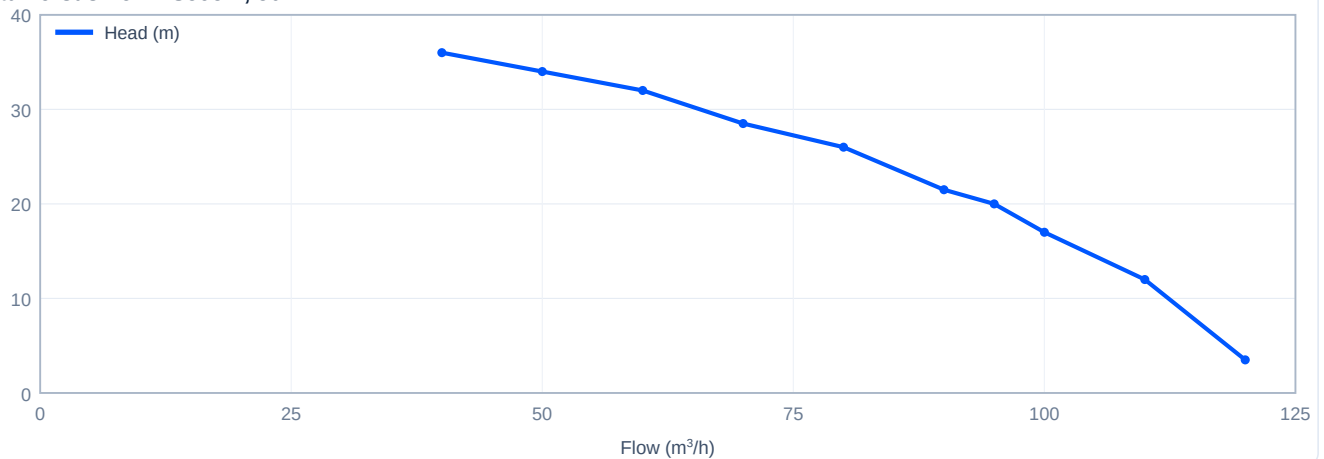

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
40	36
50	34
60	32
70	28.5
80	26



Flow (m³/h)	Head (m)
90	21.5
95	20
100	17
110	12
120	3.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-A866A. Contact: +92 345 9547419 sales@cnppakistan.com