

SJ12-7

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001119

Scan to open this online



FLOW RANGE

4 - 21 m³/h

HEAD RANGE

28 - 63 m

MOTOR

4 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ12
Stages	7
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	4 kW (5.5 hp)
Max pressure	16 bar
Connection	Thread Rp2
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 9))

Performance curve

Head versus flow - SJ12-7, 60 Hz

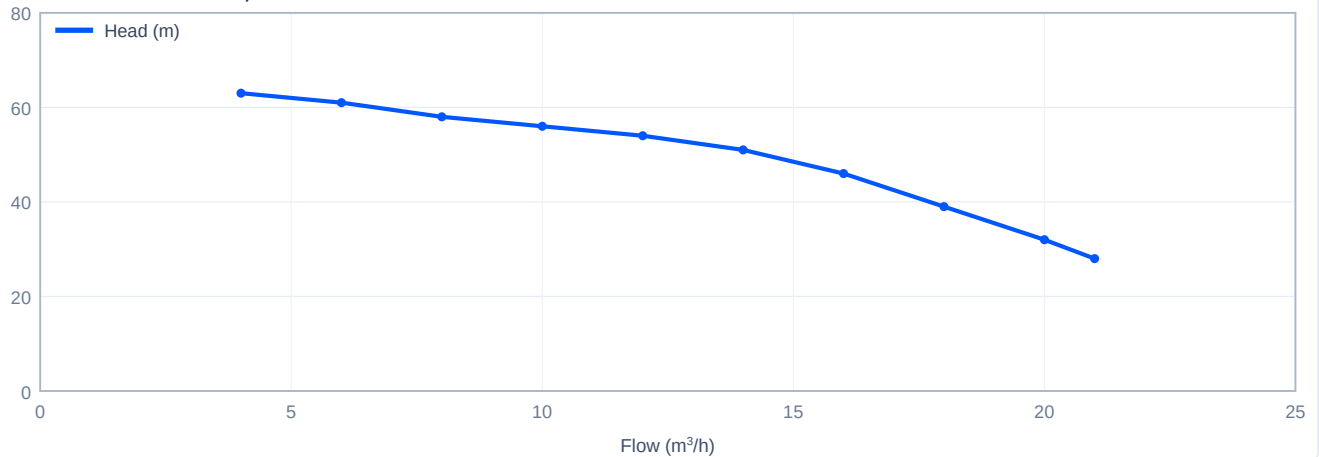

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	63
6	61
8	58
10	56
12	54



Flow (m³/h)	Head (m)
14	51
16	46
18	39
20	32
21	28

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-05474. Contact: +92 345 9547419 sales@cnppakistan.com