

SJ150-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001679

Scan to open this online



FLOW RANGE

90 - 200 m³/h

HEAD RANGE

56.5 - 71.5 m

MOTOR

45 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ150
Stages	2
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	45 kW (60 hp)
Max pressure	23 bar
Connection	Thread Rp6
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 17))

Performance curve

Head versus flow - SJ150-2, 60 Hz

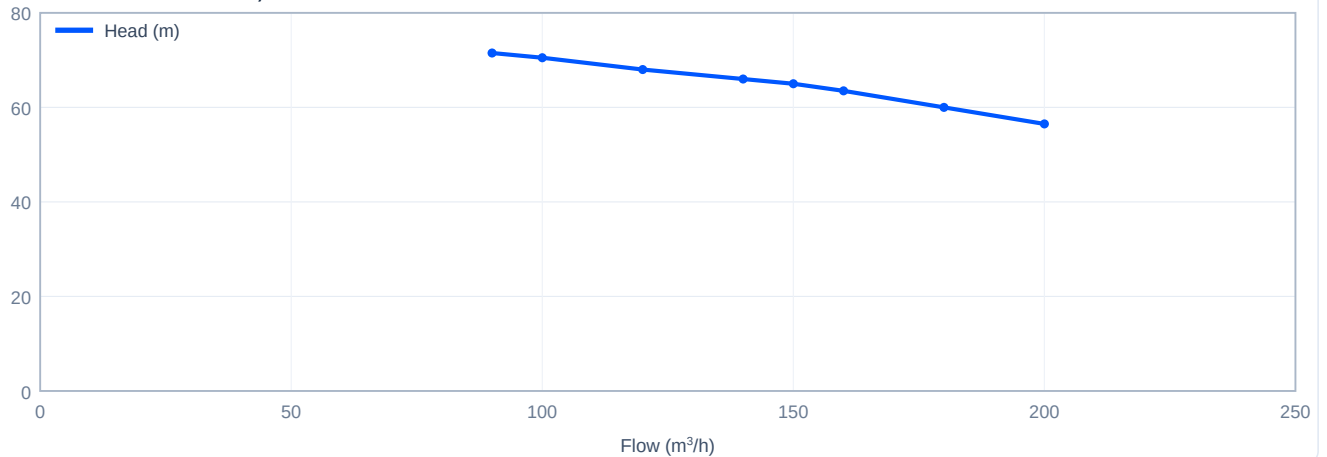

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
90	71.5
100	70.5
120	68
140	66
150	65



Flow (m³/h)	Head (m)
160	63.5
180	60
200	56.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-2ED43. Contact: +92 345 9547419 sales@cnppakistan.com