

# SJ17-1

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001788

Scan to open this online



FLOW RANGE

**4 - 26 m<sup>3</sup>/h**

HEAD RANGE

**5 - 14 m**

MOTOR

**1.1 kW**

SPEED


**3450 rpm**

## Specifications

|                 |                                                                                        |
|-----------------|----------------------------------------------------------------------------------------|
| Series          | <b>SJ (deep-well submersible)</b>                                                      |
| Size            | <b>SJ17</b>                                                                            |
| Stages          | <b>1</b>                                                                               |
| Mains frequency | <b>60 Hz</b>                                                                           |
| Speed           | <b>3450 rpm</b>                                                                        |
| Motor power     | <b>1.1 kW (1.5 hp)</b>                                                                 |
| Max pressure    | <b>26 bar</b>                                                                          |
| Connection      | <b>Thread Rp2½</b>                                                                     |
| Data basis      | <b>Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 10))</b> |

## Performance curve

Head versus flow - SJ17-1, 60 Hz

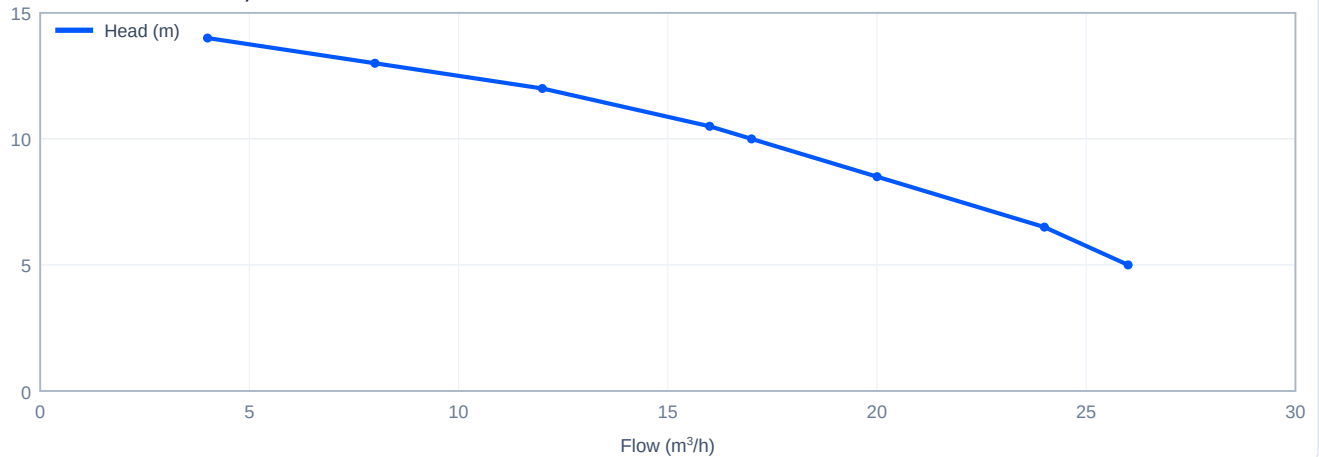

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

## Performance table

| Flow (m <sup>3</sup> /h) | Head (m) |
|--------------------------|----------|
| 4                        | 14       |
| 8                        | 13       |
| 12                       | 12       |
| 16                       | 10.5     |
| 17                       | 10       |



| Flow (m³/h) | Head (m) |
|-------------|----------|
| 20          | 8.5      |
| 24          | 6.5      |
| 26          | 5        |

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-A9C72. Contact: +92 345 9547419 sales@cnppakistan.com