

SJ17-2

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001543

Scan to open this online



FLOW RANGE

4 - 26 m³/h

HEAD RANGE

11.5 - 28 m

MOTOR

2.2 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ17
Stages	2
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	2.2 kW (3 hp)
Max pressure	26 bar
Connection	Thread Rp2½
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 10))

Performance curve

Head versus flow - SJ17-2, 60 Hz

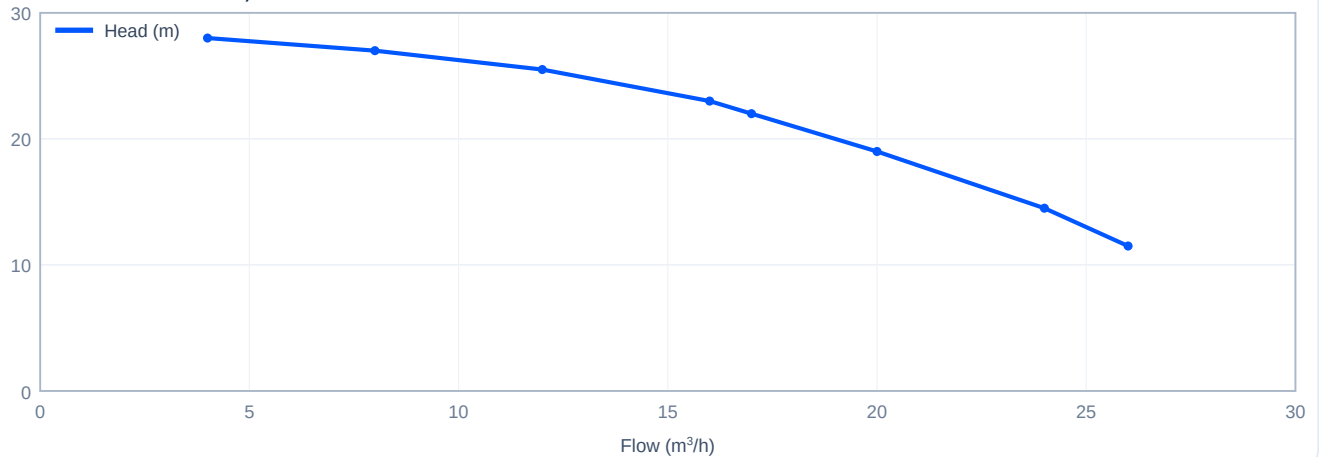

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
4	28
8	27
12	25.5
16	23
17	22



Flow (m³/h)	Head (m)
20	19
24	14.5
26	11.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-D20CB. Contact: +92 345 9547419 sales@cnppakistan.com