

SJ3-5

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001442

Scan to open this online



FLOW RANGE

0.6 - 4.6 m³/h

HEAD RANGE

16 - 43 m

MOTOR

0.55 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ3
Stages	5
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	0.55 kW (0.75 hp)
Max pressure	25 bar
Connection	Thread Rp1¼
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 6))

Performance curve

Head versus flow - SJ3-5, 60 Hz

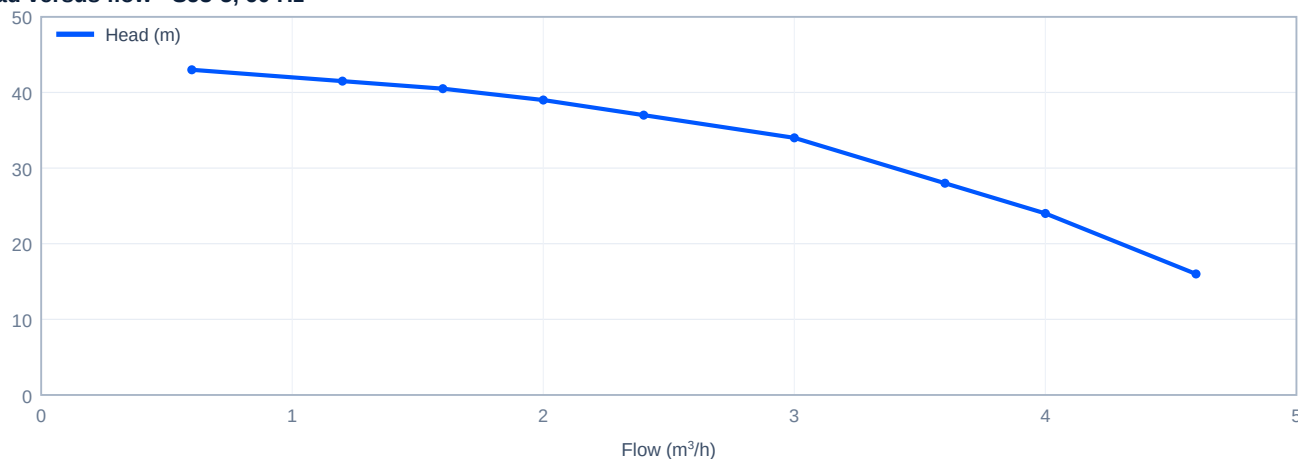

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
0.6	43
1.2	41.5
1.6	40.5
2	39
2.4	37



Flow (m³/h)	Head (m)
3	34
3.6	28
4	24
4.6	16

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-5ABB3. Contact: +92 345 9547419 sales@cnppakistan.com