

SJ30-1

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001584

Scan to open this online



FLOW RANGE

8 - 46 m³/h

HEAD RANGE

4.5 - 16 m

MOTOR

1.5 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ30
Stages	1
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	1.5 kW (2 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 11))

Performance curve

Head versus flow - SJ30-1, 60 Hz

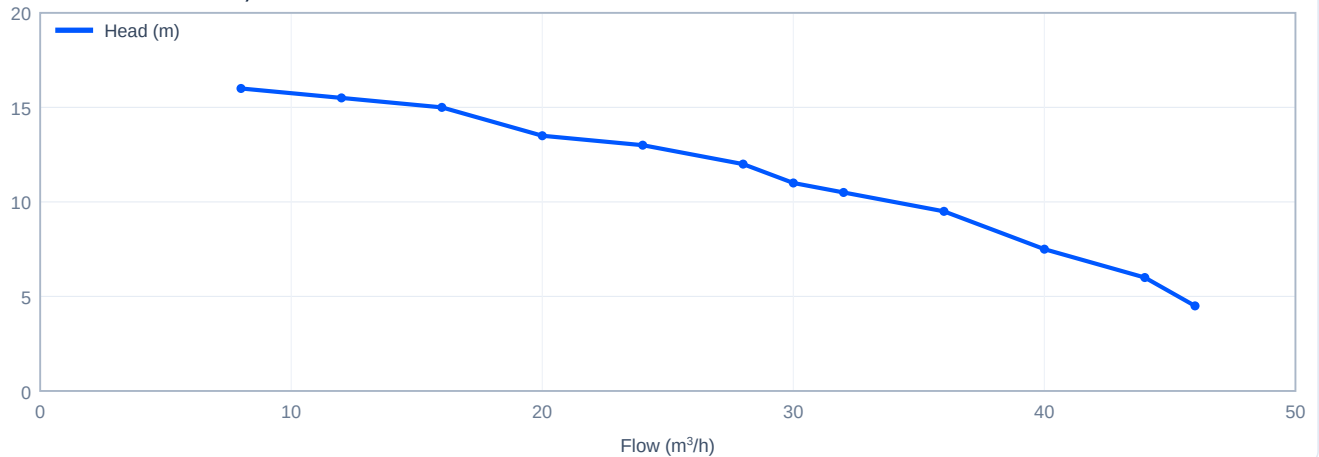

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
8	16
12	15.5
16	15
20	13.5
24	13



Flow (m³/h)	Head (m)
28	12
30	11
32	10.5
36	9.5
40	7.5
44	6
46	4.5

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-3C559. Contact: +92 345 9547419 sales@cnppakistan.com