

SJ30-16

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-001872

Scan to open this online



FLOW RANGE

8 - 46 m³/h

HEAD RANGE

103 - 260 m

MOTOR

25 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ30
Stages	16
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	25 kW (34 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 11))

Performance curve

Head versus flow - SJ30-16, 60 Hz

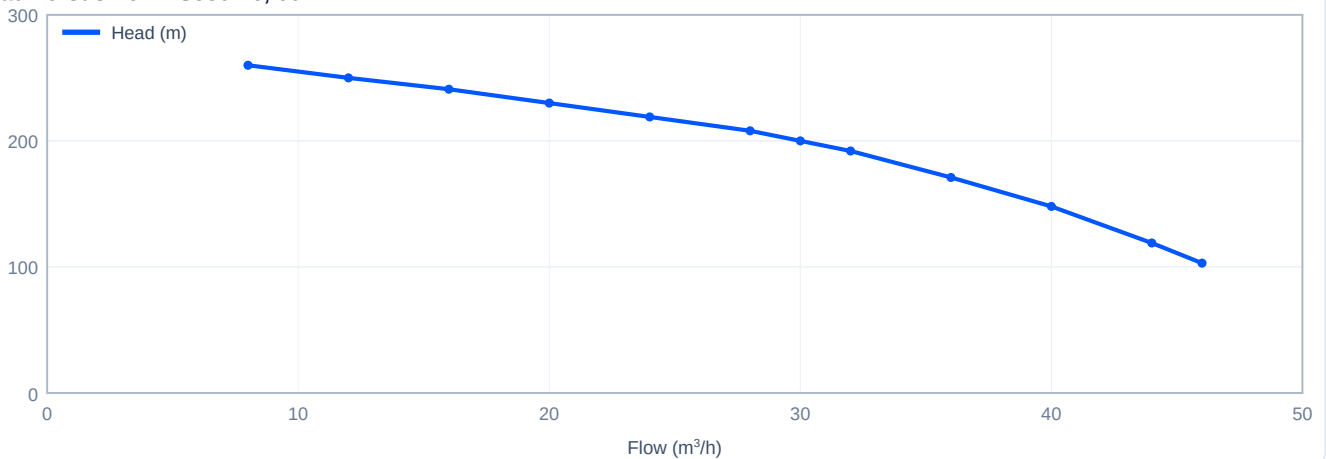

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
8	260
12	250
16	241
20	230
24	219



Flow (m³/h)	Head (m)
28	208
30	200
32	192
36	171
40	148
44	119
46	103

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-675D4. Contact: +92 345 9547419 sales@cnppakistan.com