

SJ30-17

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump



CNP-M-000852

Scan to open this online



FLOW RANGE

8 - 46 m³/h

HEAD RANGE

110 - 276 m

MOTOR

25 kW

SPEED


3450 rpm

Specifications

Series	SJ (deep-well submersible)
Size	SJ30
Stages	17
Mains frequency	60 Hz
Speed	3450 rpm
Motor power	25 kW (34 hp)
Max pressure	28 bar
Connection	Thread Rp3
Data basis	Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 11))

Performance curve

Head versus flow - SJ30-17, 60 Hz

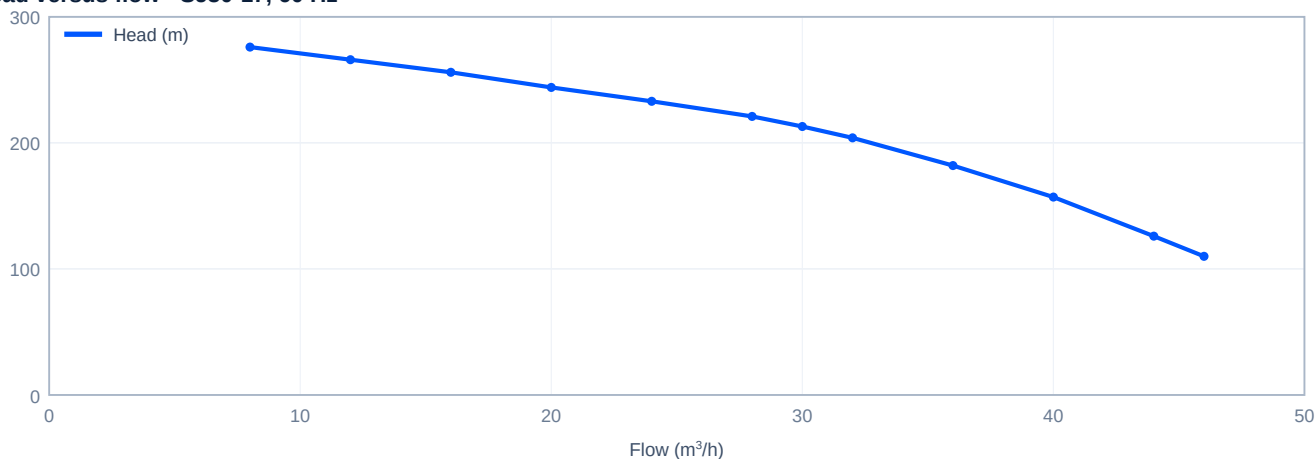

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m ³ /h)	Head (m)
8	276
12	266
16	256
20	244
24	233



Flow (m³/h)	Head (m)
28	221
30	213
32	204
36	182
40	157
44	126
46	110

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261028-B97A4. Contact: +92 345 9547419 sales@cnppakistan.com