CNP PUMPS PAKISTAN

SJ42-4

SJ (deep-well submersible) | Deep-well submersible multistage stainless steel pump

CNP-M-001542

Scan to open this online

FLOW RANGE	HEAD RANGE	MOTOR	SPEED
10 - 70 m³/h	**27 - 74 m**	**11 kW**	**3450 rpm**

Specifications

Series	**SJ (deep-well submersible)**
Size	**SJ42**
Stages	**4**
Mains frequency	**60 Hz**
Speed	**3450 rpm**
Motor power	**11 kW (15 hp)**
Max pressure	**28 bar**
Connection	**Thread Rp3**
Data basis	**Published performance curve (Performance table, SJ 60 Hz size page (PDF p. 12))**

Performance curve

Head versus flow - SJ42-4, 60 Hz

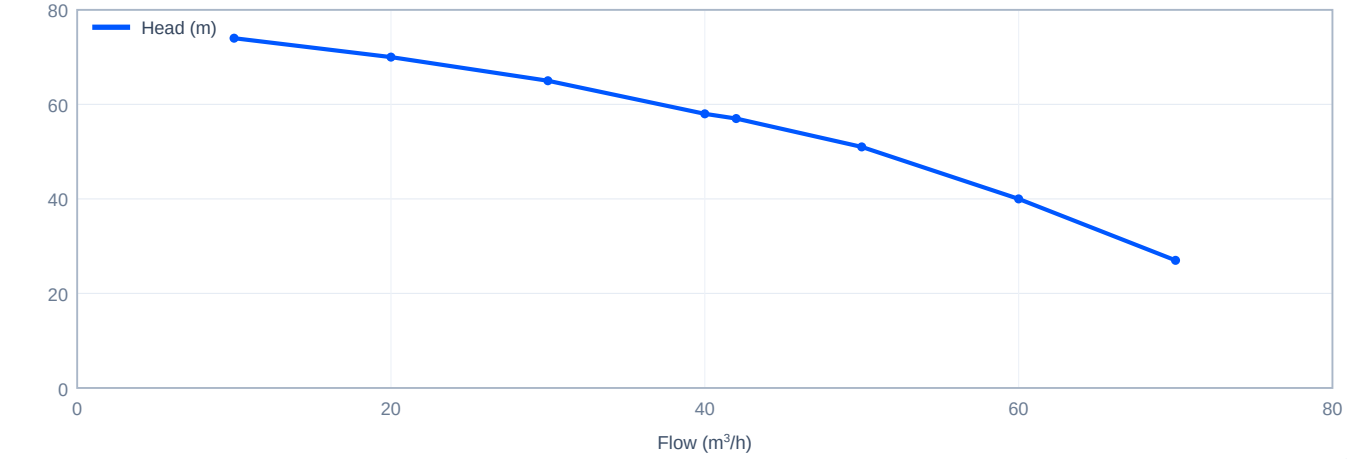

Efficiency, shaft power and NPSHr are not published for this model in the source catalogue.

Performance table

Flow (m³/h)	Head (m)
10	74
20	70
30	65
40	58
42	57

Flow (m^3/h)	Head (m)
50	51
60	40
70	27

Performance is for clean water at 20 °C unless stated, per the CNP published catalogue. Tolerances follow ISO 9906. This datasheet is for selection guidance; final selection, materials and price are confirmed in our written quotation. Reference SR-261029-4101D. Contact: +92 345 9547419 sales@cnppakistan.com